




Performance Curves

SCPP 1/030

Slip correction viscosity (CPS)

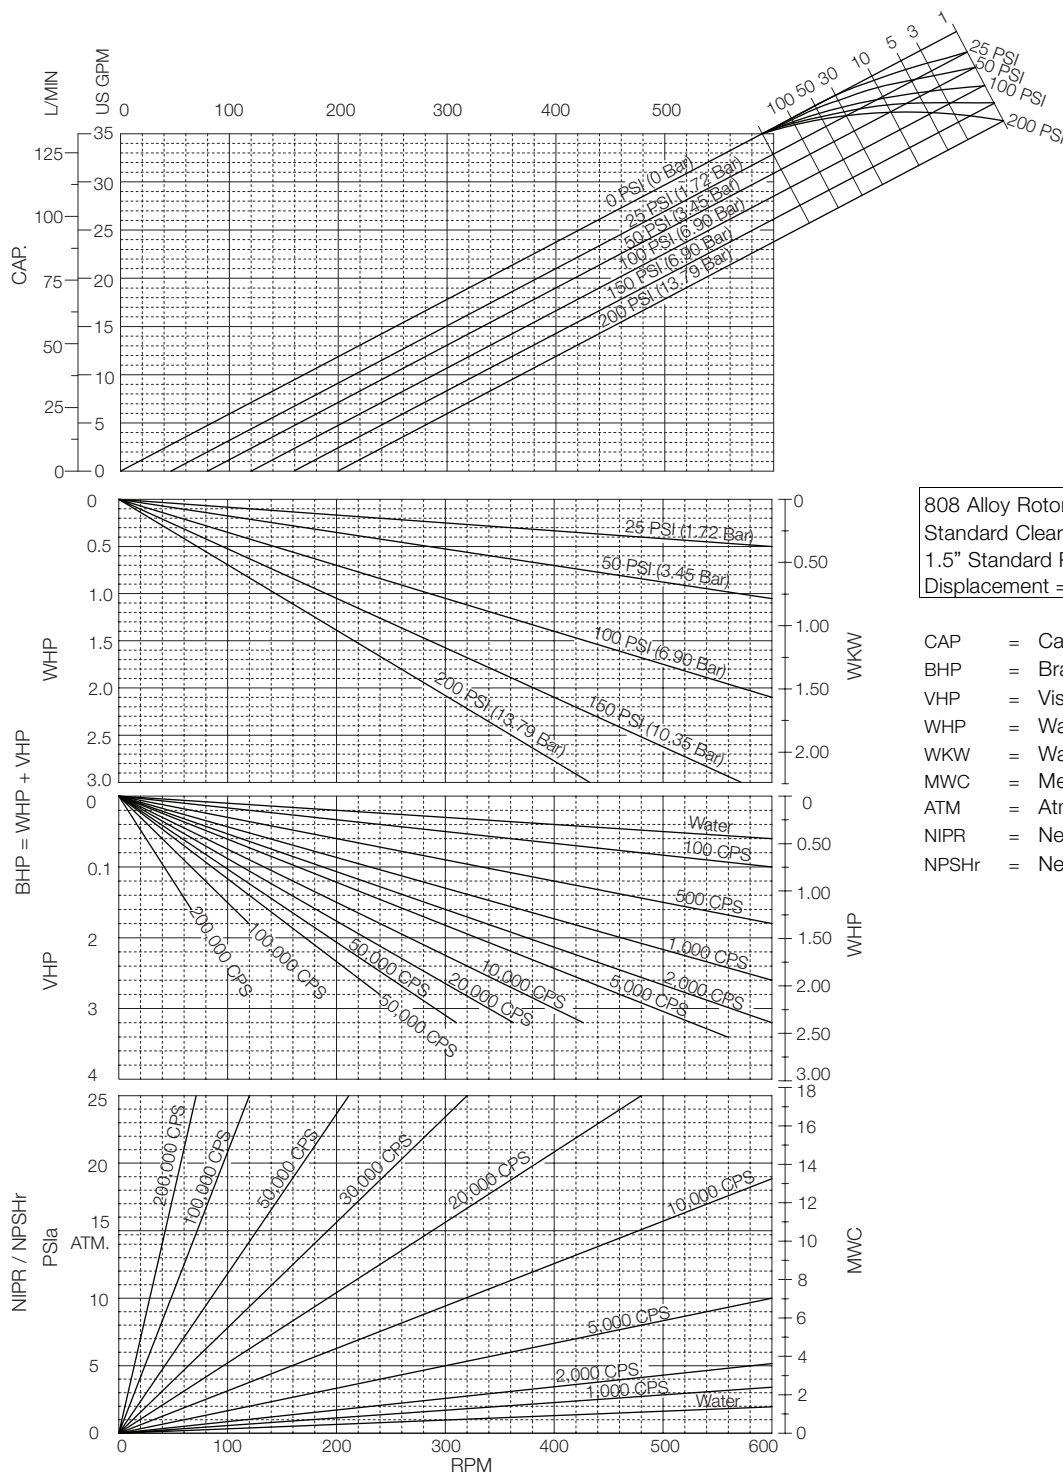

808 Alloy Rotors
Standard Clearance
1.5" Standard Ports
Displacement = 0.060 Gal/rev. (.227 L/Rev.)

CAP = Capacity
BHP = Brake Horsepower
VHP = Viscosity Horsepower
WHP = Water Horsepower
WKW = Water Kilowatts
MWC = Meters Water Column
ATM = Atmospheric Pressure
NIPR = Net Inlet Pressure Required
NPSHr = Net Positive Suction Head

Alfa Laval reserves the right to change specifications without prior notification. ALFA LAVAL is a trademark registered and owned by Alfa Laval Corporate AB.

ESE01716EN 1507

© Alfa Laval

How to contact Alfa Laval

Contact details for all countries are continually updated on our website. Please visit www.alfalaval.com to access the information direct.