




# Performance Curves

SCPP 2/060

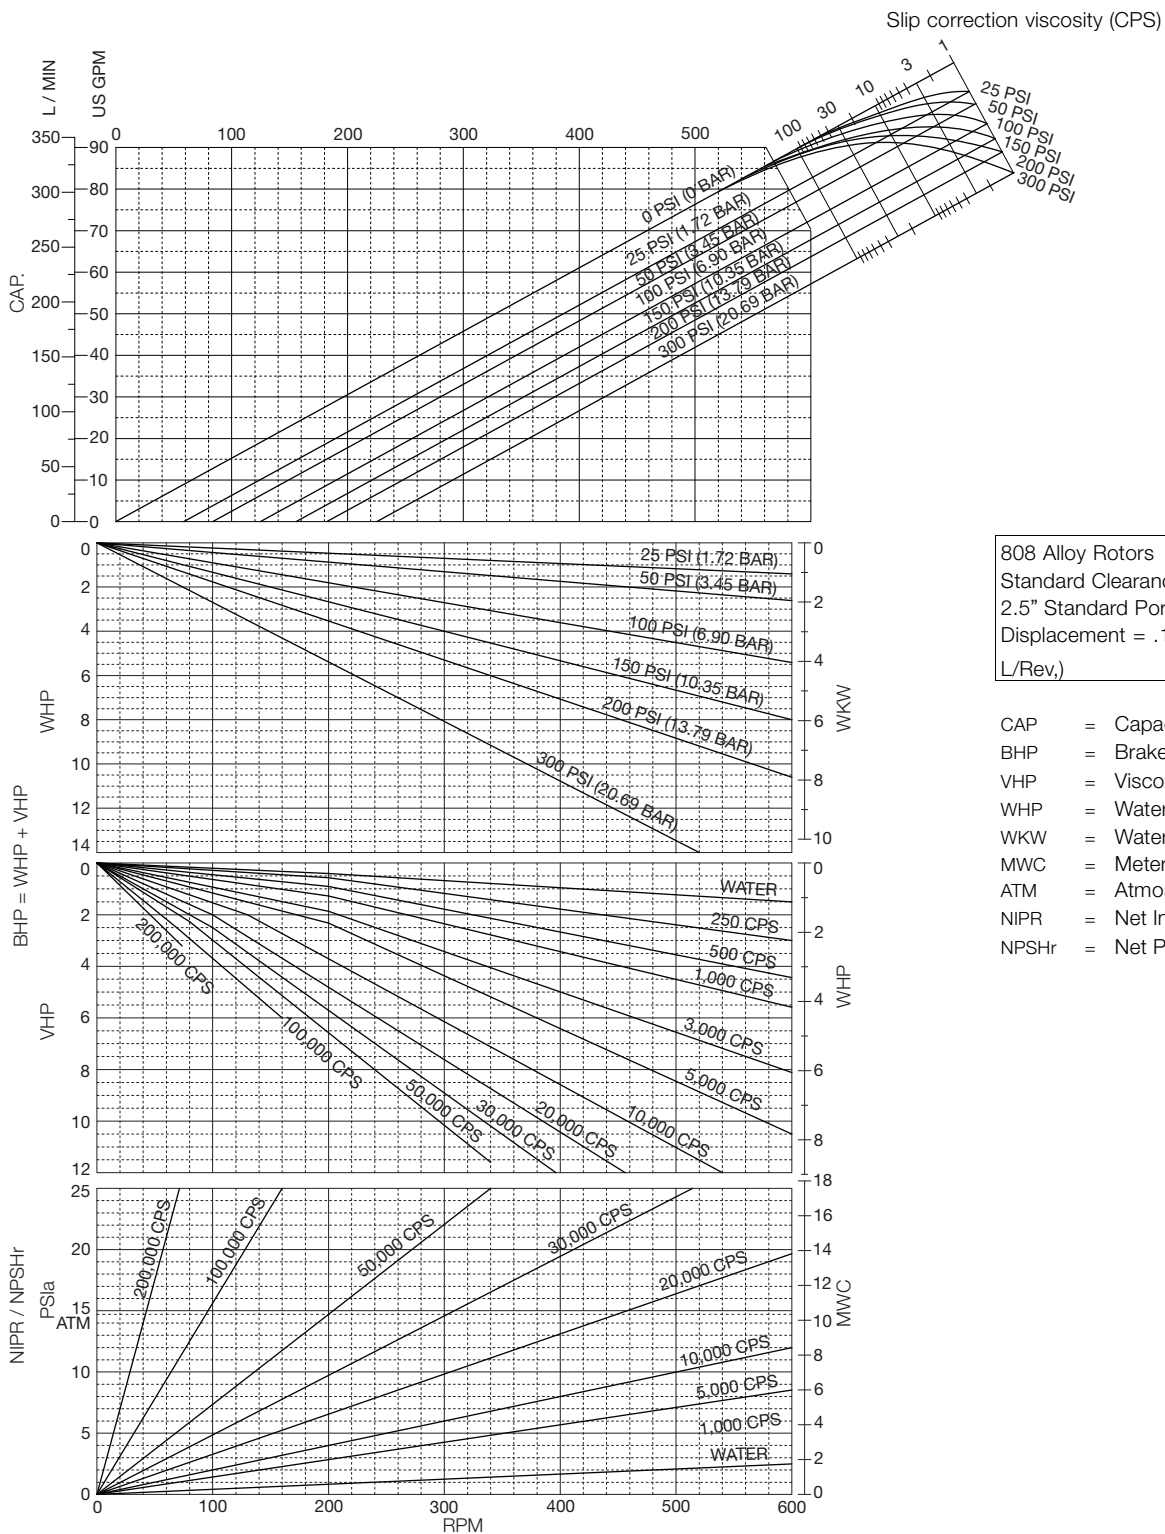

808 Alloy Rotors  
Standard Clearance  
2.5" Standard Ports  
Displacement = .150 Gal/rev. (.568 L/Rev.)

CAP = Capacity  
BHP = Brake Horsepower  
VHP = Viscosity Horsepower  
WHP = Water Horsepower  
WKW = Water Kilowatts  
MWC = Meters Water Column  
ATM = Atmospheric Pressure  
NIPR = Net Inlet Pressure Required  
NPSHr = Net Positive Suction Head

Alfa Laval reserves the right to change specifications without prior notification. ALFA LAVAL is a trademark registered and owned by Alfa Laval Corporate AB.

ESE01726EN 1507

© Alfa Laval

---

**How to contact Alfa Laval**

Contact details for all countries are continually updated on our website. Please visit [www.alfalaval.com](http://www.alfalaval.com) to access the information direct.