



Airsock unit coolers TYR-A

Standard coolers with Stainless Steel tubing





Contents

	page
Model indication	2
Eurovent	2
Capacities	2
General information	3
Standard product configuration	3
Non standard executions	4
Correction factors & Selection example	5
Capacities & technical data	6
Fans	10
Defrost systems	11
Dimensions	12


Eurovent

Within Europe, a wide variety of published data on capacities are in use, generally depending on national standards. Most in use by the leading manufacturers are national and international standards like DIN, ENV, NEN-EN and ASHRAE. Due to this, customers have not been able to make objective product comparisons, since data published on capacities were based on DT_1 , DTM, dry or wet conditions, with or without certification, etc.



To meet the European requirements on EN standards, the European Refrigeration Industry embodied by Eurovent has set standards to guarantee an independent certification procedure for forced convection air cooled condensers based on NEN-EN 327 and unit air coolers based on NEN-EN 328. Being an active member of Eurovent, the capacities of the Alfa Laval commercial cooler programme, as given in the technical documentation, are based on NEN-EN 328 (evaporating temperature $t_0 = -8^\circ\text{C}$, 8 K temperature difference between air-on temperature and evaporating temperature (DT_1)).

Model indication

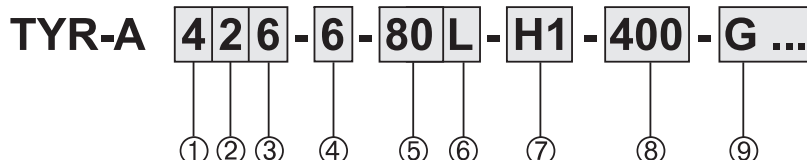

Pos.	Reference	Options
1	Cooler module	1 - 4
2	Number of fans	1 - 3
3	Tube rows	4 or 6 tube rows in air direction
4	Fin spacing	4, 6 and 7 mm
5	Ext. pressure	40, 60, 80, 100, 120 Pa
6	Fan speed	L, H (1000/1500 rpm)
7	Circuiting design	2H, H1, H2 ...
8	Current	400 = 230/400/50/3 230 = 230/50/1
9	Options	For a full survey of all available options see page 4

In order to enable air cooler selection for operating conditions, technical documentation should also give capacities for humid/frosted conditions. According to Eurovent these 'frosted conditions' are to be calculated by multiplying 'dry capacities' with a factor 1.15. These data can be found in the capacity tables, in the columns marked "frosted".

Capacities

Frosted conditions

- Lightly frosted coil.
- Relative humidity 85 %.
- Suction gas superheating 62% of the temperature difference (DT_1), with a minimum of 3.5 K.
- Refrigerant liquid temperature 30°C

Evaporating temperature t_0

Evaporating temperature t_0 is the saturated temperature according to the pressure at the suction outlet of the cooler.

Dry conditions

Cooling capacity where no condensation or ice build-up occurs on the coil (100% sensible cooling). This condition is used by Eurovent to standardise capacity ratings but should not be used when selecting coolers. For cooler selection use the columns marked "frosted".



General Information

For air sock application Alfa Laval has developed a special air sock cooler range. These TYR-A coolers are fitted with an airsock ring and fan motors capable of supplying the extra external pressure that is required for the proper functioning of airsocks. TYR-A ranges to 78 models with 1 to 3 fans.

Application area: evaporating temperatures of +5 down to -15 °C using either ammonia (R-717), halogen refrigerants, CO₂, or secondary refrigerants.

Capacities (Eurovent SC 2) 4 up to 41 kW.

Air sock diameters 450 up to 730 mm.

Air sock selection

For a correct selection and dimensioning of air sock systems to be used in combination with TYR-A coolers, you will have to consult your air sock supplier.

Other TYR models

TYR

The TYR series is a wide and flexible range of industrial air coolers fitted with blow-through or draw-through fans. These models have been highly standardised in construction and dimensions, while maintaining flexibility in fin spacings, coil construction and circuiting design.



TYR-D

Low silhouette dual discharge air coolers.



TYR-F

Air cooler models TYR-F have been optimized for the refrigerated storage of agricultural products. These cooler models are characterised by an optimised capacity / air volume ratio and a relatively low profile.

All TYR, TYR-D, TYR-F and TYR-A models are also available with copper tubing (THOR range).




Two-Year Guarantee

Because Alfa Laval has the fullest confidence in the product quality, a two-year full guarantee is given.

Product Configuration

- Finned coil
 - 4 coil block modules
 - 4 or 6 tube rows deep
 - Stainless steel tubing Ø 16 mm
 - Tube pitch 50 x 50 mm square
 - Corrugated Alu-fins
 - Fin spacings 4, 6 and 7 mm.
- 1-3 Fans, drawing through the coil, available in a range of different executions.
Air sock diameters Ø 450 mm up to Ø 730 mm.
Fan motors protection class IP55.
- Corrosion resistant casing material:
Aluminium/Sendzimir, white epoxy coated (RAL 9003).
- Hinged, enclosed endcovers.
- Hinged driptray.
Drain(s) 32 mm PVC connection, freely adjustable into either horizontal or vertical position.
- Refrigerant distribution optimised to refrigerant applied.
- Refrigerant connections on right hand side (fan side view)
- Fitted with schrader valve on the suction connection for testing purposes (not for R-717).
- Sufficient room for fitting the expansion valve inside.
- Suitable for dry expansion or pumped system.
DX-coolers for halogen refrigerants are fitted with Cu-distributor.
- Stickers indicate fan direction and refrigerant in/out.
- Delivery in mounting position. Coolers are mounted on wooden beams. Installation can take place with use of a forklift.
- Design pressure 33 bar (H(C)FC), 27 bar (ammonia) or 6 bar (brine). Higher design pressures on request.
Each heat exchanger is leak tested with dry air and finally supplied with a nitrogen pre-charge.





Options

■ Defrost systems

- Hot gas coil in drip tray
- Electric defrost
- Water defrost

G1
E1, E4
W

Electric defrost for air coolers with pumped refrigerant circulation or in glycol execution on special request only.

■ Drip tray insulation

- Styropore 10 mm + cladding
- Foamglass 25 mm + cladding

I 2
I 3



■ Refrigerant connections


Left hand side, fan side view

L

■ Mounting feet

For floor mounting, coolers can be equipped with hot dip galvanized steel mounting feet. The positioning of these is the same as the suspension brackets for ceiling mounting.

MF



■ Isolating switch (mounted)

ISM

■ Secondary refrigerant

Air coolers for secondary refrigerant application can be selected with our selection software. Extra information on request.

■ Stainless steel 304 casing

SSC

■ Suction hood

SH

■ Fan motors 400/60/3 or 230/60/1

Non-standard executions *(on request only)*

■ Higher capacities

■ Special fan motors:

- Dual fan speed motors
- Variable fan speed motors
- EC fans
- Alternative electrical supply 460/60/3

■ Built in heater coil sections

Drip tray Insulation (I)

For specific operational conditions the air coolers can be fitted with drip tray insulation.

Insulation of the drip tray is recommended for air coolers with hot gas defrosting used at a room temperature below -5 °C. For areas with high relative humidity it may also be necessary to insulate other parts of the casing.

At extra cost this drip tray insulation can be combined with the usual epoxy coating.

Note : When selecting drip tray insulation the overall height "B" of the coolers (see page 12) increases by the thickness of the insulation material applied.

Selection Example DT₁

Refrigerant	R-404A dx
Selected fin spacing	6 or 7 mm
Required external pressure	80 Pa
Fan speed	1500 rpm
Required cooling capacity	15 kW
Air-on temperature	+6 °C
Evaporating temperature	0 °C

- 1) DT₁ = +6 - 0 = 6 K
- 2) Correction factor DT₁/ R-404A : 1.28
- 3) Multiply required capacity
with correction factor : 15 x 1.28 = 19.2 kW.
- 4) Cooler models can be selected in columns 'capacity / ext. press. 80 Pa' on page 8 with a nominal capacity of 19.2 kW.

For the above mentioned conditions the following models can be selected :

- TYR-A 326-6, nom. cap. 20.9 kW.
- TYR-A 424-6, nom. cap. 19.2 kW.
- TYR-A 236-7, nom. cap. 19.7 kW.
- TYR-A 326-7, nom. cap. 19.7 kW.
- TYR-A 334-7, nom. cap. 21.4 kW.

Depending on parameters such as *air flow*, *number of fans* and *dimensions* (see tables) a final cooler model selection can take place.

Capacity values as given in the tables are nominal capacities.

Standard condition SC	Air on temp. °C	Evaporating temperature °C	Factor dry/frosted
SC1	10	0	1.35
SC2	0	-8	1.15
SC3	-18	-25	1.05
SC4	-25	-31	1.01

SC 2 : Nominal capacity for cooling design.

Air-on temperature is the air temperature at the intake side of the coil block.

Correction factors

DT ₁ K	Evaporating temperature °C				
	+5	0	-5	-8	-10
R-404A dx					
6	1.22	1.28	1.33		1.38
7	1.02	1.07	1.13		1.18
8	0.87	0.92	0.97	1.00	1.03
9	0.76	0.81	0.86		0.91
R-134a dx					
6	1.28	1.37	1.45		1.53
7	1.07	1.15	1.23		1.31
8	0.92	0.99	1.06		1.14
9	0.80	0.87	0.93		1.01
R-22 dx					
6	1.28	1.34	1.40		1.45
7	1.08	1.13	1.19		1.24
8	0.92	0.97	1.03		1.08
9	0.80	0.85	0.90		0.96
R-404A pumped system					
6	1.00	1.07	1.13		1.19
7	0.82	0.88	0.94		1.00
8	0.70	0.75	0.80		0.85
9	0.60	0.65	0.69		0.74
R-22 pumped system					
6	1.13	1.21	1.28		1.34
7	0.92	0.98	1.05		1.10
8	0.76	0.82	0.88		0.93
9	0.64	0.70	0.75		0.80
R-717 pumped system (ammonia)					
6	0.96	1.03	1.09	1.12	1.14
7	0.79	0.84	0.90	0.93	0.95
8	0.66	0.71	0.76	0.78	0.80
9	0.56	0.61	0.65	0.67	0.69
R-717 pumped system (ammonia)					
6	0.96	1.03	1.09	1.12	1.14
7	0.79	0.84	0.90	0.93	0.95
8	0.66	0.71	0.76	0.78	0.80
9	0.56	0.61	0.65	0.67	0.69

Correction factors for other refrigerants, alternative fin materials, coatings and optional coil block configurations on request.

Air sock unit coolers

TYR-A

Capacities R-404A

n = 1000 rpm

Cooler model	Nominal capacity*			
	ext. press. 40 Pa		ext. press. 60 Pa	
	kW	air flow (m ³ /h)	kW	air flow (m ³ /h)
TYR-A				
Fin spacing 4 mm				
214-4-* L	4.8	2740		
216-4-* L	6.4	2710		
224-4-* L	9.5	5480		
226-4-* L	12.7	5420		
234-4-* L	14.3	8220		
236-4-* L	19.1	8140		
Fin spacing 6 mm				
314-6-* L	5.9	4300	5.3	3760
316-6-* L	8.0	4250	7.3	3710
324-6-* L	11.7	8610	10.7	7520
326-6-* L	16.1	8510	14.6	7430
334-6-* L	17.6	12910	16.0	11280
336-6-* L	24.1	12770	21.9	11150
414-6-* L	7.4	5550	7.2	5200
416-6-* L	10.2	5480	9.9	5140
424-6-* L	14.9	11100	14.5	10420
426-6-* L	20.3	10970	19.8	10300
434-6-* L	22.3	16650	21.7	15630
436-6-* L	30.5	16470	29.7	15450
Fin spacing 7 mm				
214-7-* L	3.7	2860		
216-7-* L	5.2	2820		
224-7-* L	7.5	5720		
226-7-* L	10.3	5650		
234-7-* L	11.2	8580		
236-7-* L	15.5	8480		
314-7-* L	5.5	4370	5.0	3810
316-7-* L	7.6	4320	6.9	3770
324-7-* L	11.0	8730	10.0	7620
326-7-* L	15.2	8630	13.8	7540
334-7-* L	16.5	13100	15.0	11440
336-7-* L	22.7	12950	20.7	11300
414-7-* L	7.0	5620	6.8	5280
416-7-* L	9.6	5560	9.4	5220
424-7-* L	13.9	11250	13.6	10560
426-7-* L	19.2	11130	18.7	10440
434-7-* L	20.9	16880	20.3	15840
436-7-* L	28.8	16690	28.1	15670

* t₀ = -8 °C and DT₁ = 8 K, frosted

Air sock unit coolers

TYR-A

Technical data

n = 1000 rpm

Cooler model TYR-A	Sound press. dB(A)	Coil surface m ²	Int. vol. dm ³	Cooler weight kg	Dimensions (mm)			Fans	
					length A	height B	air sock diameter	capacity kW	number
Fin spacing 4 mm									
214-4* L	53	46.0	12	71	1300	680	500	0.25	1
216-4* L	53	68.9	19	81	1300	680	500	0.25	1
224-4* L	56	91.9	20	112	2100	680	500	0.25	2
226-4* L	56	137.9	30	133	2100	680	500	0.25	2
234-4* L	58	137.9	28	153	2900	680	500	0.25	3
236-4* L	58	206.8	42	185	2900	680	500	0.25	3
Fin spacing 6 mm									
314-6* L	56	41.7	17	89	1300	880	555	0.25	1
316-6* L	56	62.5	25	102	1300	880	555	0.25	1
324-6* L	59	83.3	27	144	2100	880	555	0.25	2
326-6* L	59	125.0	40	170	2100	880	555	0.25	2
334-6* L	61	125.0	37	198	2900	880	555	0.25	3
336-6* L	61	187.5	56	238	2900	880	555	0.25	3
414-6* L	58	52.1	19	102	1500	880	730	0.45	1
416-6* L	58	78.1	29	118	1500	880	730	0.45	1
424-6* L	61	104.1	32	166	2500	880	730	0.45	2
426-6* L	61	156.2	48	199	2500	880	730	0.45	2
434-6* L	63	156.2	45	230	3500	880	730	0.45	3
436-6* L	63	234.3	67	280	3500	880	730	0.45	3
Fin spacing 7 mm									
214-7* L	53	27.0	12	69	1300	680	500	0.25	1
216-7* L	53	40.6	19	78	1300	680	500	0.25	1
224-7* L	56	54.1	20	108	2100	680	500	0.25	2
226-7* L	56	81.1	30	127	2100	680	500	0.25	2
234-7* L	58	81.1	28	147	2900	680	500	0.25	3
236-7* L	58	121.7	42	176	2900	680	500	0.25	3
314-7* L	56	36.1	17	88	1300	880	555	0.25	1
316-7* L	56	54.1	25	101	1300	880	555	0.25	1
324-7* L	59	72.1	27	142	2100	880	555	0.25	2
326-7* L	59	108.2	40	168	2100	880	555	0.25	2
334-7* L	61	108.2	37	196	2900	880	555	0.25	3
336-7* L	61	162.2	56	234	2900	880	555	0.25	3
414-7* L	58	45.1	19	101	1500	880	730	0.45	1
416-7* L	58	67.6	29	117	1500	880	730	0.45	1
424-7* L	61	90.1	32	164	2500	880	730	0.45	2
426-7* L	61	135.2	48	196	2500	880	730	0.45	2
434-7* L	63	135.2	45	227	3500	880	730	0.45	3
436-7* L	63	202.8	67	275	3500	880	730	0.45	3

Changes possible without prior notice

Air sock unit coolers

TYR-A

Capacities R-404A

n = 1500 rpm

Cooler model	Nominal capacity*									
	ext. press. 40 Pa		ext. press. 60 Pa		ext. press. 80 Pa		ext. press. 100 Pa		ext. press. 120 Pa	
	kW	air flow (m ³ /h)	kW	air flow (m ³ /h)	kW	air flow (m ³ /h)	kW	air flow (m ³ /h)	kW	air flow (m ³ /h)
Fin spacing 4 mm										
116-4-* H	6.7	3280	6.5	3080	5.9	2670				
126-4-* H	13.5	6570	13.0	6160	11.8	5340				
136-4-* H	20.2	9860	19.6	9240	17.7	8010				
214-4-* H	6.5	4580	6.4	4380	6.1	3980				
216-4-* H	8.7	4540	8.6	4340	8.1	3940				
224-4-* H	13.1	9170	12.8	8770	12.1	7980				
226-4-* H	17.5	9070	17.1	8680	16.2	7890				
234-4-* H	19.6	13750	19.2	13160	18.2	11960				
236-4-* H	26.2	13610	25.7	13020	24.3	11830				
Fin spacing 6 mm										
314-6-* H	8.1	7510	7.9	7170	7.6	6830	7.4	6420	7.2	6010
316-6-* H	11.1	7430	10.7	7090	10.4	6750	10.1	6350	9.8	5940
324-6-* H	16.2	15040	15.7	14350	15.2	13670	14.8	12850	14.3	12030
326-6-* H	22.1	14860	21.5	14190	20.9	13510	20.2	12700	19.6	11890
334-6-* H	24.2	22550	23.6	21530	22.9	20500	22.2	19270	21.5	18040
336-6-* H	33.2	22300	32.2	21280	31.3	20270	30.4	19050	29.4	17840
414-6-* H	10.0	9400	9.7	8890	9.6	8550	9.3	8200	9.2	7950
416-6-* H	13.7	9290	13.3	8780	13.2	8450	12.8	8110	12.7	7850
424-6-* H	20.0	18800	19.4	17780	19.2	17100	18.7	16410	18.5	15900
426-6-* H	27.4	18580	26.6	17570	26.4	16900	25.6	16220	25.3	15710
434-6-* H	30.0	28200	29.2	26660	28.9	25640	28.0	24610	27.7	23840
436-6-* H	41.1	27880	39.9	26360	39.5	25350	38.4	24330	38.0	23570
Fin spacing 7 mm										
116-7-* H	5.5	3420	5.3	3210	4.8	2780				
126-7-* H	10.9	6850	10.6	6420	9.6	5560				
136-7-* H	16.4	10270	15.9	9630	14.4	8350				
214-7-* H	5.1	4780	5.0	4570	4.8	4150				
216-7-* H	7.1	4720	6.9	4510	6.6	4100				
224-7-* H	10.3	9560	10.1	9140	9.5	8310				
226-7-* H	14.2	9450	13.9	9040	13.1	8220				
234-7-* H	15.4	14340	15.1	13720	14.3	12470				
236-7-* H	21.3	14180	20.8	13560	19.7	12330				
314-7-* H	7.6	7620	7.4	7280	7.1	6930	6.9	6510	6.7	6100
316-7-* H	10.4	7540	10.1	7190	9.8	6850	9.5	6440	9.3	6030
324-7-* H	15.1	15250	14.7	14550	14.3	13860	13.8	13030	13.4	12200
326-7-* H	20.9	15070	20.3	14390	19.7	13700	19.1	12880	18.5	12060
334-7-* H	22.7	22870	22.1	21830	21.4	20790	20.8	19540	20.1	18300
336-7-* H	31.3	22610	30.4	21580	29.5	20550	28.6	19320	27.8	18080
414-7-* H	9.4	9530	9.1	9010	9.0	8670	8.7	8320	8.7	8060
416-7-* H	12.9	9420	12.5	8910	12.4	8570	12.1	8220	11.9	7970
424-7-* H	18.7	19060	18.2	18020	18.0	17330	17.5	16630	17.3	16110
426-7-* H	25.8	18850	25.1	17820	24.9	17140	24.1	16450	23.9	15940
434-7-* H	28.1	28580	27.3	27020	27.0	25990	26.2	24950	26.0	24170
436-7-* H	38.8	28260	37.6	26720	37.3	25700	36.2	24670	35.8	23900

* t₀ = -8 C and DT₁ = 8 K, frosted

Changes possible without prior notice



Air sock unit coolers

TYR-A

Technical data

n = 1500 rpm

Cooler model TYR-A	Sound press. dB(A)	Coil surface m ²	Int. vol. dm ³	Cooler weight kg	Dimensions (mm)			Fans	
					length A	height B	air sock diameter	capacity kW	number
Fin spacing 4 mm									
116-4-* H	57	57.5	11	74	1300	580	450	0.25	1
126-4-* H	60	114.9	21	120	2100	580	450	0.25	2
136-4-* H	62	172.4	32	165	2900	580	450	0.25	3
214-4-* H	60	46.0	12	71	1300	680	500	0.25	1
216-4-* H	60	68.9	19	81	1300	680	500	0.25	1
224-4-* H	63	91.9	20	112	2100	680	500	0.25	2
226-4-* H	63	137.9	30	133	2100	680	500	0.25	2
234-4-* H	65	137.9	28	153	2900	680	500	0.25	3
236-4-* H	65	206.8	42	185	2900	680	500	0.25	3
Fin spacing 6 mm									
314-6-* H	63	41.7	17	89	1300	880	555	0.55	1
316-6-* H	63	62.5	25	102	1300	880	555	0.55	1
324-6-* H	66	83.3	27	144	2100	880	555	0.55	2
326-6-* H	66	125.0	40	170	2100	880	555	0.55	2
334-6-* H	68	125.0	37	198	2900	880	555	0.55	3
336-6-* H	68	187.5	56	238	2900	880	555	0.55	3
414-6-* H	65	52.1	19	102	1500	880	730	1.20	1
416-6-* H	65	78.1	29	118	1500	880	730	1.20	1
424-6-* H	68	104.1	32	166	2500	880	730	1.20	2
426-6-* H	68	156.2	48	199	2500	880	730	1.20	2
434-6-* H	70	156.2	45	230	3500	880	730	1.20	3
436-6-* H	70	234.3	67	280	3500	880	730	1.20	3
Fin spacing 7 mm									
116-7-* H	57	33.8	11	72	1300	580	450	0.25	1
126-7-* H	60	67.6	21	116	2100	580	450	0.25	2
136-7-* H	62	101.4	32	159	2900	580	450	0.25	3
214-7-* H	60	27.0	12	69	1300	680	500	0.25	1
216-7-* H	60	40.6	19	78	1300	680	500	0.25	1
224-7-* H	63	54.1	20	108	2100	680	500	0.25	2
226-7-* H	63	81.1	30	127	2100	680	500	0.25	2
234-7-* H	65	81.1	28	147	2900	680	500	0.25	3
236-7-* H	65	121.7	42	176	2900	680	500	0.25	3
314-7-* H	63	36.1	17	88	1300	880	555	0.55	1
316-7-* H	63	54.1	25	101	1300	880	555	0.55	1
324-7-* H	66	72.1	27	142	2100	880	555	0.55	2
326-7-* H	66	108.2	40	168	2100	880	555	0.55	2
334-7-* H	68	108.2	37	196	2900	880	555	0.55	3
336-7-* H	68	162.2	56	234	2900	880	555	0.55	3
414-7-* H	65	45.1	19	101	1500	880	730	1.20	1
416-7-* H	65	67.6	29	117	1500	880	730	1.20	1
424-7-* H	68	90.1	32	164	2500	880	730	1.20	2
426-7-* H	68	135.2	48	196	2500	880	730	1.20	2
434-7-* H	70	135.2	45	227	3500	880	730	1.20	3
436-7-* H	70	202.8	67	275	3500	880	730	1.20	3

Changes possible without prior notice



Fans

For TYR-A coolers there is a choice of 8 different fan capacities and either 1000 or 1500 rpm fan speeds. Fans are suitable for external pressures ranging from 40 up to 120 Pa.

Execution

Fans are executed with balanced aluminium or polyamide fan blades, fitted with robust electrolytically galvanized and epoxy coated fan guards according to DIN 31001. Fans are mounted in vibration dampers.

Enclosed design spray-tight motors, protection class IP-55.

All motors, with the exception of the 0.18 kW, 230/50/1 motor, are equipped with a thermal safety device built in the windings, connected to separate terminals in the box.

This safety device can therefore be integrated into the control circuit. The electrical control should be arranged preferably with a manual reset device in order to prevent continuous on/off switching (tripping) of the motors. Cable inlet ranges from 7 up to 12 mm.

Sound pressure dB(A)

Sound pressure as given in the tables are sound pressure levels in dB(A) according to EN 13487 at 5 m distance in free field conditions. Values may deviate depending on situations at site. The table below gives calculated sound pressure corrections at various distances.

Distance m	Correction dB(A)
1	+ 14
2	+ 8
3	+ 4
4	+ 2
5	0
10	- 6
20	-12
50	-20

Fans 50 Hz

Fan motor W	Motor voltage* V	Electric capacity		Adj. value overload relays		cable inlet
		nom.	abs.	A		
		kW	kW***	0 °C	-20 °C	
Fan motors n = 1000 rpm						
250	230/400/3	0.25	0.33	1.2	1.3	2 x M20x1.5
180	230/1**	0.18	0.35	2.4	2.5	2 x M20x1.5
450	230/400/3	0.45	0.45	2.0	2.1	2 x M20x1.5
Fan motors n = 1500 rpm						
250	230/400/3	0.25	0.37	1.1	1.1	2 x M20x1.5
220	230/1	0.22	0.37	2.6	2.8	2 x M20x1.5
550	230/400/3	0.55	0.70	1.7	1.8	2 x M20x1.5
550	230/1	0.55	0.70	5.5	6.0	2 x M20x1.5
1200	230/400/3	1.20	1.20	3.0	3.2	2 x M20x1.5

* Motor windings 230 Volt.

** These 230/50/1 motors are suitable for temperatures down to -20 °C and are not provided with a thermal safety device in the windings.

*** Absorbed fan motor energy is measured in under laboratory conditions at ambient temperature 20 °C. These values may vary depending on local conditions.




Defrost Systems

Several forced defrost systems are available. Each defrost system is optimised for specific applications and ambient conditions.

Hot Gas Defrost (G)

The drip tray can be fitted with a defrost coil (G) to bring it rapidly up to temperature by means of hot gas. The following G-system is available :

- G1** *Air on temperature down to - 5 °C.*
Defrost coil under the coil block.



Water Defrost (W)

- W** Water defrost system.

Electric Defrost (E)

Stainless steel heater elements placed in additional tubes between the evaporator tubes. The elements for the drip tray are fitted to the bottom of the inner tray. Both coil and drip tray have the same elements.

Standard voltage per element 230 V.

Connection to 230 V / 1 phase or 400 V / 3 phase, connected in star with Zero-Wire.

Total defrost power is given for 400 V / 3 phase with Zero-Wire.

All elements can be withdrawn at the refrigerant connection side. The drip tray elements can be taken out after removal of the outer tray. The heater elements are pre-wired and are connected to one or more terminal boxes.

Depending on the ambient temperature and air humidity a number of E-executions are available.

- E1** *Air on temperature down to - 25 °C.*
Electric stainless steel defrost elements in the drip tray.
For use in combination with for example hot gas defrost in the coil block.

- E4** *Air on temperature down to - 5 °C.*
Electric stainless steel defrost elements in the coil block and drip tray, low duty.

Defrost power

Cooler type TYR-A	Elements article number	E1		E4	
		nr of elements	cap. kW	nr of elements	cap. kW
116	33.03.21	2	2.1	3 + 1	4.2
126	33.03.31	2	4.0	3 + 1	8.1
136	33.03.39	2	6.0	3 + 1	11.9
214	33.03.21	2	2.1	3 + 1	4.2
216	33.03.21	2	2.1	4 + 1	5.3
224	33.03.31	2	4.0	3 + 1	8.1
226	33.03.31	2	4.0	4 + 1	10.1
234	33.03.39	2	6.0	3 + 1	11.9
236	33.03.39	2	6.0	4 + 1	14.9
314	33.03.21	2	2.1	4 + 1	5.3
316	33.03.21	2	2.1	5 + 1	6.4
324	33.03.31	2	4.0	4 + 1	10.1
326	33.03.31	2	4.0	5 + 1	12.1
334	33.03.39	2	6.0	4 + 1	14.9
336	33.03.39	2	6.0	5 + 1	17.9
414	33.03.24	2	2.4	4 + 1	6.1
416	33.03.24	2	2.4	5 + 1	7.3
424	33.03.36	2	4.9	4 + 1	12.1
426	33.03.36	2	4.9	5 + 1	14.6
434	33.03.43	2	7.4	4 + 1	18.5
436	33.03.43	2	7.4	5 + 1	22.2

Changes possible without prior notice





Air sock unit coolers

TYR-A



Dimensions

Cooler model	Dimensions (mm)									
TYR-A	A	B	C1	C2	D1	D2	E	F	G	H
11*	1320	580	800		660		450	450	260	
12*	2120	580	1600		1060		450	450	260	800
13*	2920	580	2400		1460		450	450	260	800
21*	1320	680	800		660		450	500	310	
22*	2120	680	1600		1060		450	500	310	800
23*	2920	680	2400		1460		450	500	310	800
31*	1320	880	800		660		500	555	410	
32*	2120	880	1600		1060		500	555	410	800
33*	2920	880	2400		1460		500	555	410	800
41*	1520	880	1000		760		600	730	410	
42*	2520	880	2000		1260		600	730	410	1000
43*	3520	880	1000	2000	1010	1500	600	730	410	1000

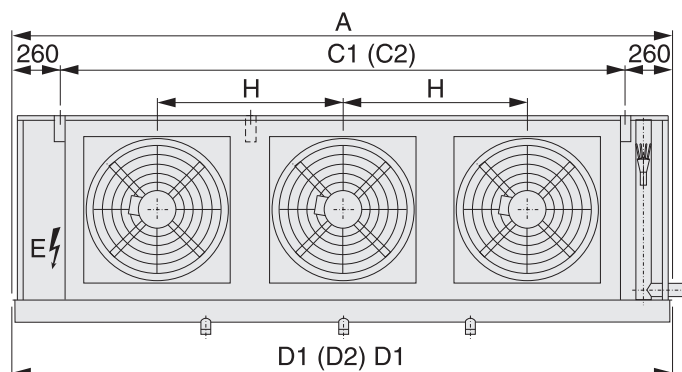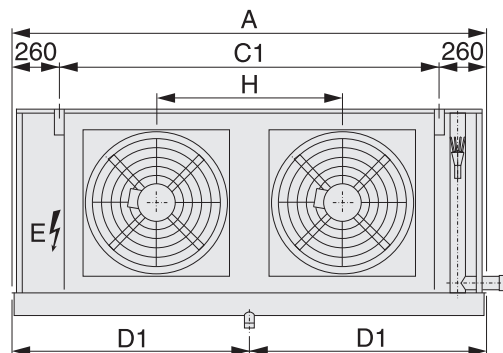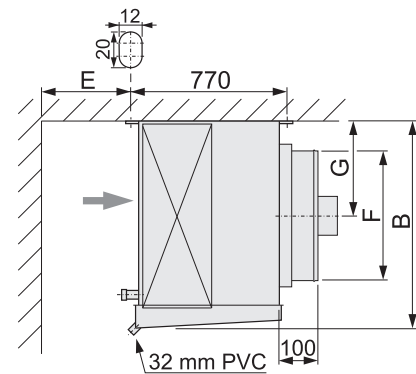

Changes possible without prior notice

Alfa Laval in brief

Alfa Laval is a leading global provider of specialized products and engineered solutions.

Our equipment, systems and services are dedicated to helping customers to optimize the performance of their processes. Time and time again.

We help our customers to heat, cool, separate and transport products such as oil, water, chemicals, beverages, foodstuffs, starch and pharmaceuticals.

Our worldwide organization works closely with customers in almost 100 countries to help them stay ahead.

How to contact Alfa Laval

Up-to-date Alfa Laval contact details for all countries are always available on our website at www.alfalaval.com