



# Performance Curves


## Alfa Laval LKH Prime/LKH Prime UltraPure 20

Motor:	60 Hz 3500 rpm. synchr.
Tolerance:	±8% for Q
Tolerance:	±6% for H
Impeller, Max. dia.:	6.496" (165 mm)
Impeller, Min. dia.:	4.331" (110 mm)
Pump inlet, Dia.:	2.5" (63.5 mm, DN 65)
Pump outlet, Dia.:	2" (51 mm, DN 50)

Performance data refer to water at 68 °F. (20 °C)

NOTE! The curves refer to motor: 17.5 Hp (13 kW), 3547 rpm. asynchr., 60 Hz. For smaller motors, reduce head (H) with: 3%.

DO NOT FORGET THE SAFETY FACTOR.

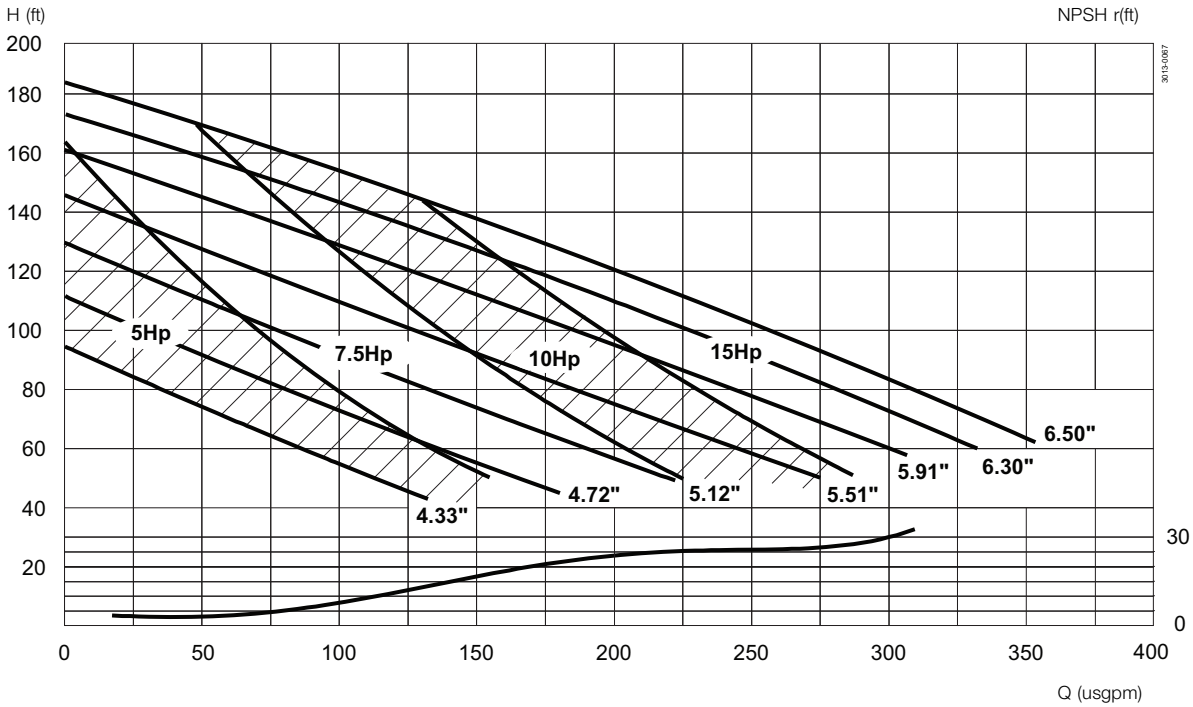

Alfa Laval reserves the right to change specifications without prior notification. ALFA LAVAL is a trademark registered and owned by Alfa Laval Corporate AB.

ESE03128ENUS 1601

© Alfa Laval

---

**How to contact Alfa Laval**

Contact details for all countries are continually updated on our website. Please visit [www.alfalaval.us](http://www.alfalaval.us) to access the information direct.