



The conductivity sensor for hygienic use

Alfa Laval Conductivity Transmitter

Application

The Alfa Laval conductivity transmitter is designed to fulfill the demands of conductivity transmitters in hygienic production. The main features are:

- Wetted parts in PEEK
- Compact, food compatible, hygienic design
- Process temperature -20 to 140°C
- 4 configurable measuring ranges
- Adjustable, active and very fast temperature compensation
- Insensitive to polarization, adhesion and solids
- Built-in graphical display and touch screen
- Compatible with Alfa Laval In-line instrumentation system
- 4-20 mA output for conductivity and temperature



TECHNICAL DATA

Conductivity

Messuring range: 50 μ S/cm to 1 S/cm

Accuracy:

0-500 μ S/cm ≤ 1.5 %

0-1/0-500 μ S/cm ≤ 1.0 %

0-1 μ S/cm ≤ 1.5 %

Temperature

Measuring range: -20 to 140°C (150°C up to 1 hour)

Resolution: 0.1°C

Accuracy: < 0.4 %

Repeatability: 0.2% of FS

Protection class: IP67

Max media pressure: 10 bar

Electrical data

Power supply: 15-35 Vdc

Power consumption max: 180 mA

Output conductivity: 4-20 mA, max. load 500 Ohm,

Output temperature: 4-20 mA, max. load 500 Ohm,

Connection: M12 plug or M16 cable gland

Response time: < 3 ms

Ambient temperature

Without display -40 - 85°C

With display -30 - 80°C

PHYSICAL DATA

Sensor lenght (L): Short or Long

Housing (\varnothing): 80 mm

Materials

Wetted parts (Short): PEEK

Wetted parts (Long): PEEK

Fieldhouse: AISI 304

Surface finish: Ra < 0.8 μ m

Operating temperature

Wetted parts: -20 to 140°C (150°C < 1 hour)

Field house: -20 to 80°C

Weight

Conductivity sensor: Approx. 1500 gr.

Process connection

- Clamp DN38 (ISO2852)/clamp DN40 (DIN32676)
- Clamp DN50 (ISO2852)/clamp DN51 (DIN32676)
- G1" (ISO228)
- DN32 (DIN11851)
- DN40 (DIN11851)
- DN50 (DIN11851)
- HTC Connection 1½"
- HTC Connection 2"
- HTC Connection 2½"
- HTC Connection 3"
- HTC Connection 4"

Certificates

-3.1 (Option) (FDA conformity declaration for Peek materials included)

-Calibration certificate (Option)

Conductivity resolution

Range	Resolution	
0 to 0.5	mS/cm	0.001 mS/cm
0 to 1	mS/cm	0.001 mS/cm
0 to 2	mS/cm	0.010 mS/cm
0 to 3	mS/cm	0.010 mS/cm
0 to 5	mS/cm	0.010 mS/cm
0 to 10	mS/cm	0.100 mS/cm
0 to 20	mS/cm	0.100 mS/cm
0 to 30	mS/cm	0.100 mS/cm
0 to 50	mS/cm	0.100 mS/cm
0 to 100	mS/cm	1.000 mS/cm
0 to 200	mS/cm	1.000 mS/cm
0 to 300	mS/cm	1.000 mS/cm
0 to 500	mS/cm	1.000 mS/cm
0 to 999	mS/cm	1.000 mS/cm

Standard range

The Alfa Laval conductivity transmitter is a transmitter for inductive measurement of conductivity. Precise, configurable temperature compensation and remote setting of the four pre-configured measuring ranges make the Alfa Laval conductivity transmitter ideal for a wide range of conductivity measurements. The integrated graphical display and touch screen offers the user instant local supervision, which is an advantage e.g. in manually operated cleaning systems.


A high operating temperature limit is an advantage in SIP systems. The optimized flow geometry and the fast response time make the Alfa Laval conductivity sensor particularly suitable in applications for separation of medias and measurements of cleaning agents in CIP equipment. The accuracy is excellent even at very low conductivity and flow rates.

Working principle

Inductive conductivity measurement is based on the principle of a transformer. The primary side of the transformer is controlled by an AC voltage generator. The liquid flowing through the channel bore in the measuring head and forms a conductor loop, which links between the primary side of the transformer and the secondary side of the transformer.

The output current is proportional with the conductivity of the media. Signal conditioning, amplification and conversion provide a 4-20 mA signal output from the galvanically isolated D/A converter.


The fast-response temperature sensor in the tip compensates for the temperature in the liquid resulting in maximum accuracy and reliability.

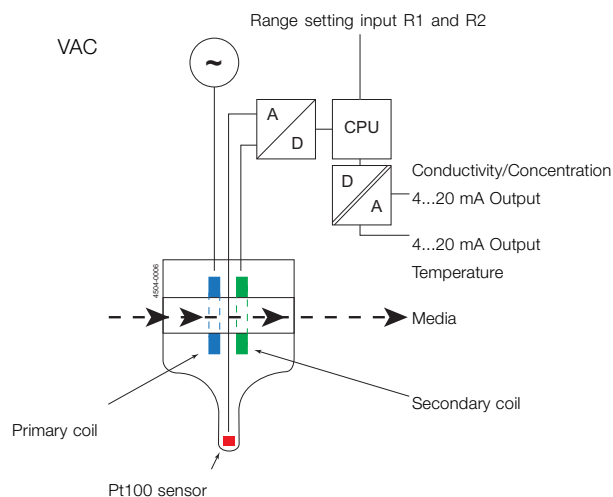

Electrical data and connections

Both output signals are as standard galvanically isolated from the power supply. Adjustment of measuring range and local readout of conductivity and temperature is done on the touch screen. Range selection can also be done remotely.


Left side electrical connection (Front view)

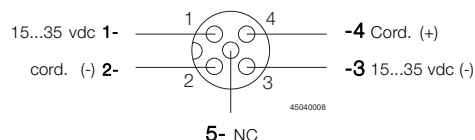

Left side M12, 5 pin connector

1. Brown	Supply(+)	(15 ... 35 vdc)
2. White	Cond. (-)	(4 ... 20 nA)
3. Blue	Supply(-)	(15 ... 35 vdc)
4. Black	Cond. (+)	(4 ... 20 nA)
5. NC	Not connected	


Right side connection (front view)

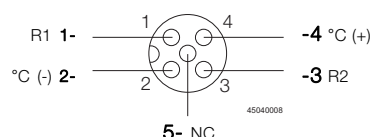

Right side M12, 5 pin connector

1. Brown	R1	(external input)
2. White	Temp. (-)	(4 ... 20 nA)
3. Blue	R2	(external input)
4. Black	Temp. (+)	(4 ... 20 nA)
5. NC	Not connected	

Right side electrical connection with relay output

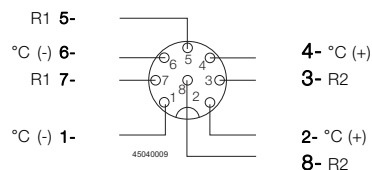


Left side M12, 5 pin connector

1. White	R1	(external input)
2. Brown	Temp. (+)	(4 ... 20 nA)
3. Green	Relay 2	
4. Yellow	Relay 2	
5. Grey	Relay 1	
6. Light red	Relay 1	
7. Blue	Temp. (+)	(4 ... 20 nA)
8. Red	R2	(external input)

To set the external input for range selection

Range	R1	R2	Range	R1	R2
1	N.C	N.C.	3	N.C.	24 VDC
2	24 VDC	N.C.	4	24 VDC	24 VDC

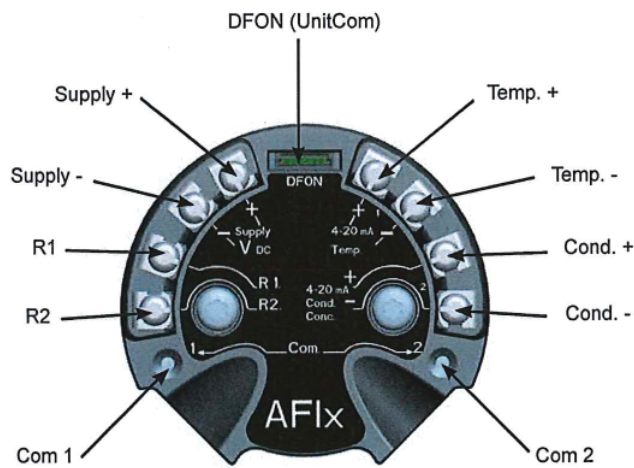


Electrical connection on the display with relay output


- 1. Not connected
- 2. Not connected
- 3. Green Relay 2
- 4. Yellow Relay 2
- 5. Grey Relay 1
- 6. Light red Relay 1
- (3 + 5 can be connected common)

UnitCom Ribbon cable to transmitter

To connect the Flexprogrammer
COM 1 Red clip
COM 2 Black clip

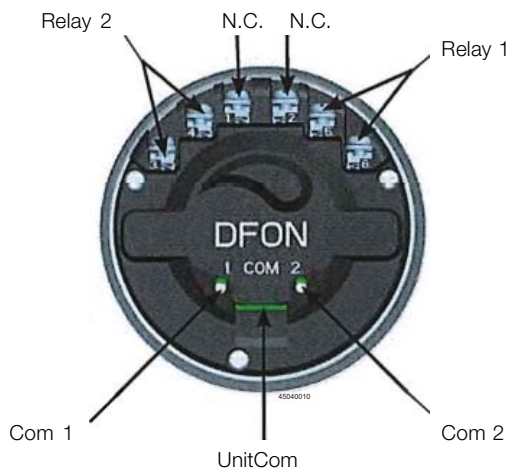


Dimensions

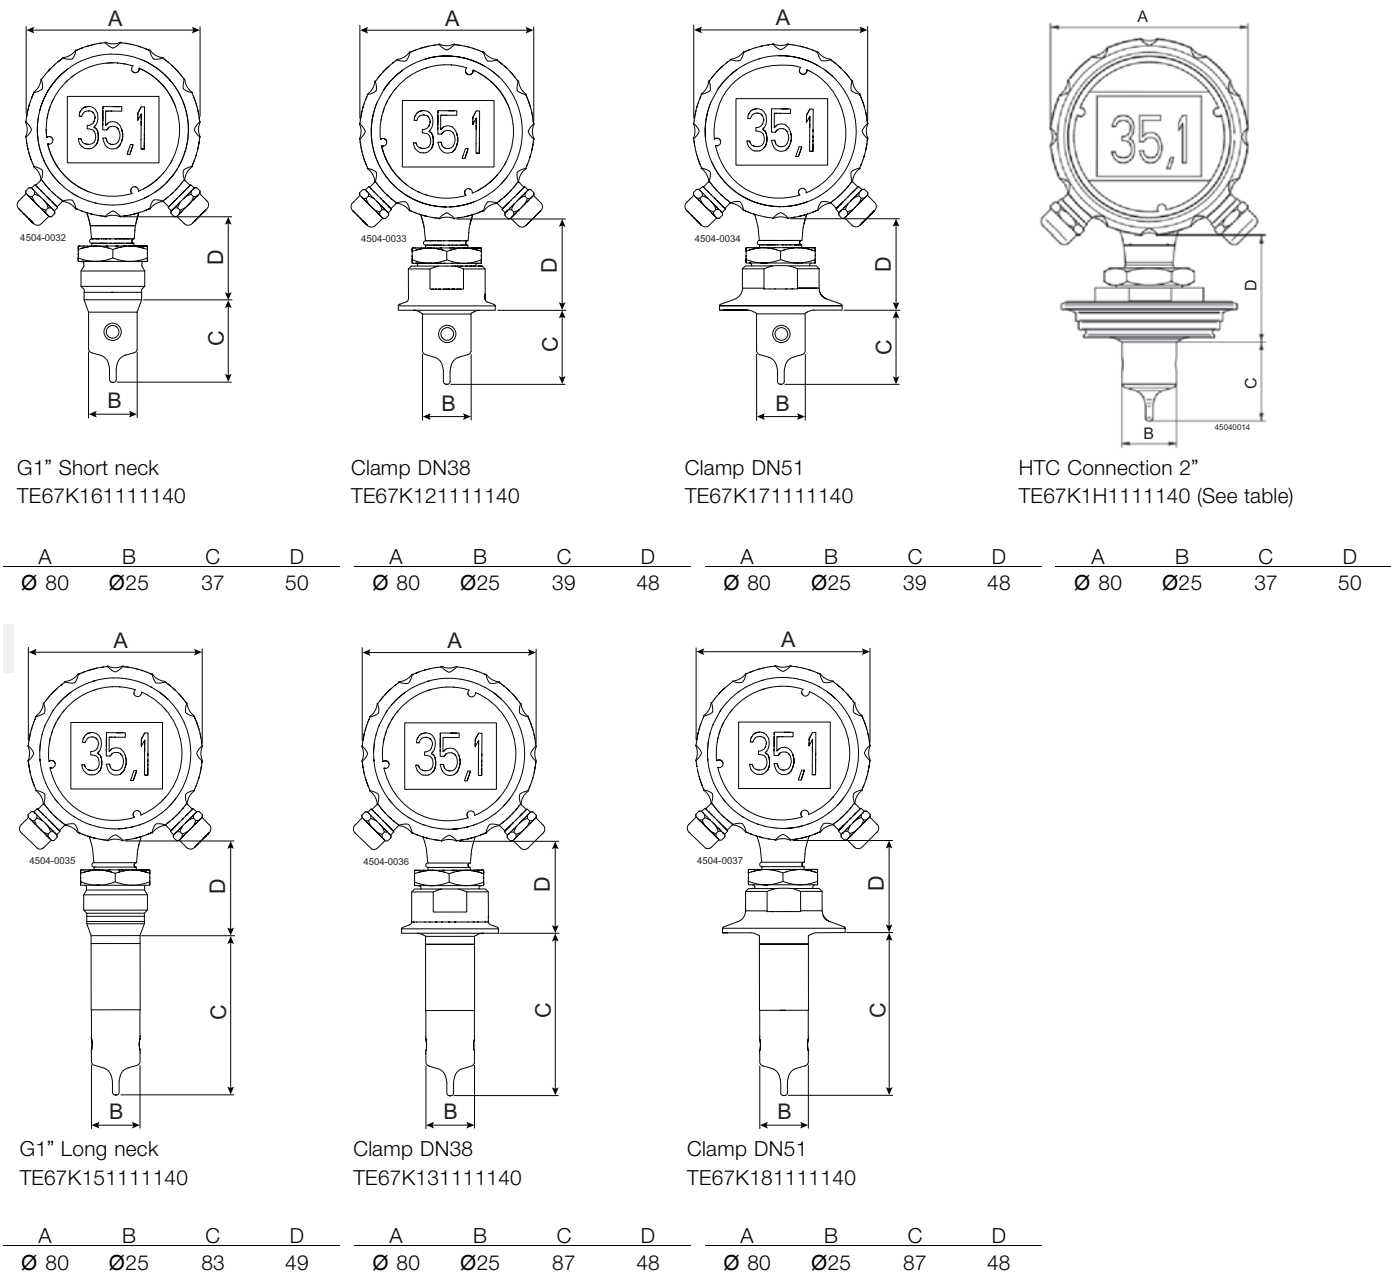


HTC Connections


Size:	Type:
Hygienic Tank Connection HTC 1-1½"	TE67K1G1111160
Hygienic Tank Connection HTC 2"	TE67K1H1111160
Hygienic Tank Connection HTC 2½"	TE67K1J1111160
Hygienic Tank Connection HTC 3"	TE67K1K1111160
Hygienic Tank Connection HTC 4"	TE67K1L1111160

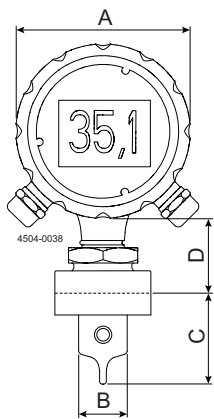

DN 32 (DIN11851)
TE67K1A1111140

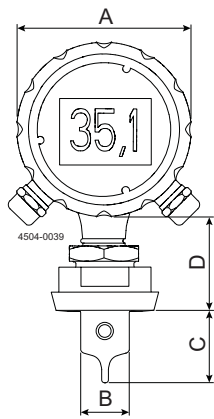


DN 40 (DIN11851)
TE67K1B1111140

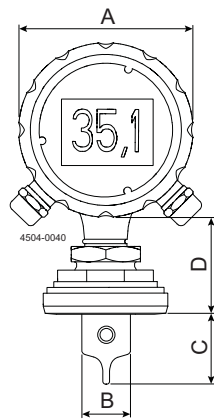


DN 50 (DIN11851)
TE67K1C1111140


A	B	C	D	A	B	C	D	A	B	C	D
Ø 80	Ø 25	36	50	Ø 80	Ø 25	37	49	Ø 80	Ø 25	36	50

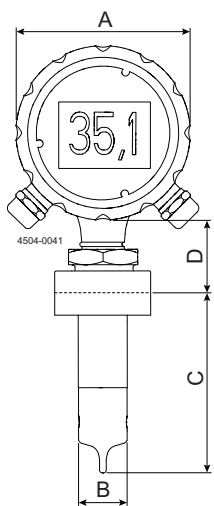

DN 32 (DIN11851)
TE67K1A1111140

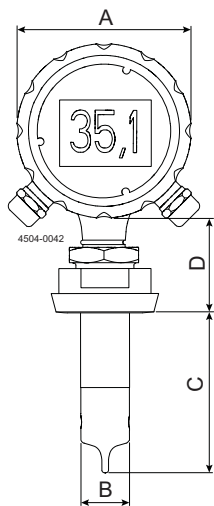

DN 40 (DIN11851)
TE67K1B1111140

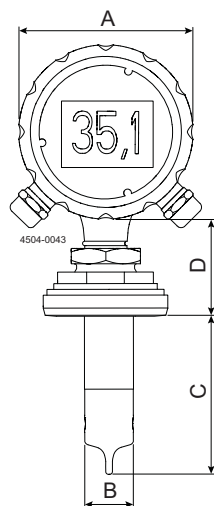

DN 50 (DIN11851)
TE67K1C1111140

A	B	C	D	A	B	C	D	A	B	C	D
Ø 80	Ø 25	83	50	Ø 80	Ø 25	83	49	Ø 80	Ø 25	83	50

Alfa Laval reserves the right to change specifications without prior notification. ALFA LAVAL is a trademark registered and owned by Alfa Laval Corporate AB.

ESE01577EN 1608

© Alfa Laval

How to contact Alfa Laval

Contact details for all countries are continually updated on our website. Please visit www.alfalaval.com to access the information direct.