



## Performance Curves

### Alfa Laval SolidC-2, 50 Hz/60 Hz

Motor:	<b>1500 rpm. synchr.</b>
	<b>1800 rpm. synchr.</b>
Tolerance:	±8% for Q ±6% for H
Impeller, Max. dia.:	190 mm
	7.48"
Impeller, Min. dia.:	140 mm
	5.51"
Pump inlet, Dia.:	63.5 mm, DN 65
	2½", DN 65
Pump outlet, Dia.:	38 mm, DN 40
	1½", DN 40

Performance data refer to water at 20 °C.

Performance data refer to water at 68 °F.

NOTE! The curves refer to motor: 1.5 kW, 1410 rpm. asynchr., 50 Hz. For smaller motors, reduce head (H) with: 3%.

NOTE! The curves refer to motor: 3,6 Hp, 1710 rpm. asynchr., 60 Hz. For smaller motors, reduce head (H) with: 3%.






DO NOT FORGET THE SAFETY FACTOR.

Motor:	<b>3000 rpm. synchr.</b>
Tolerance:	±8% for Q ±6% for H
Impeller, Max. dia.:	190 mm
Impeller, Min. dia.:	140 mm
Pump inlet, Dia.:	63.5 mm, DN 65
Pump outlet, Dia.:	38 mm, DN 40

Performance data refer to water at 20 °C.

NOTE! The curves refer to motor: 11 kW, 2945 rpm. asynchr., 50 Hz. For smaller motors, reduce head (H) with: 3%.

DO NOT FORGET THE SAFETY FACTOR.

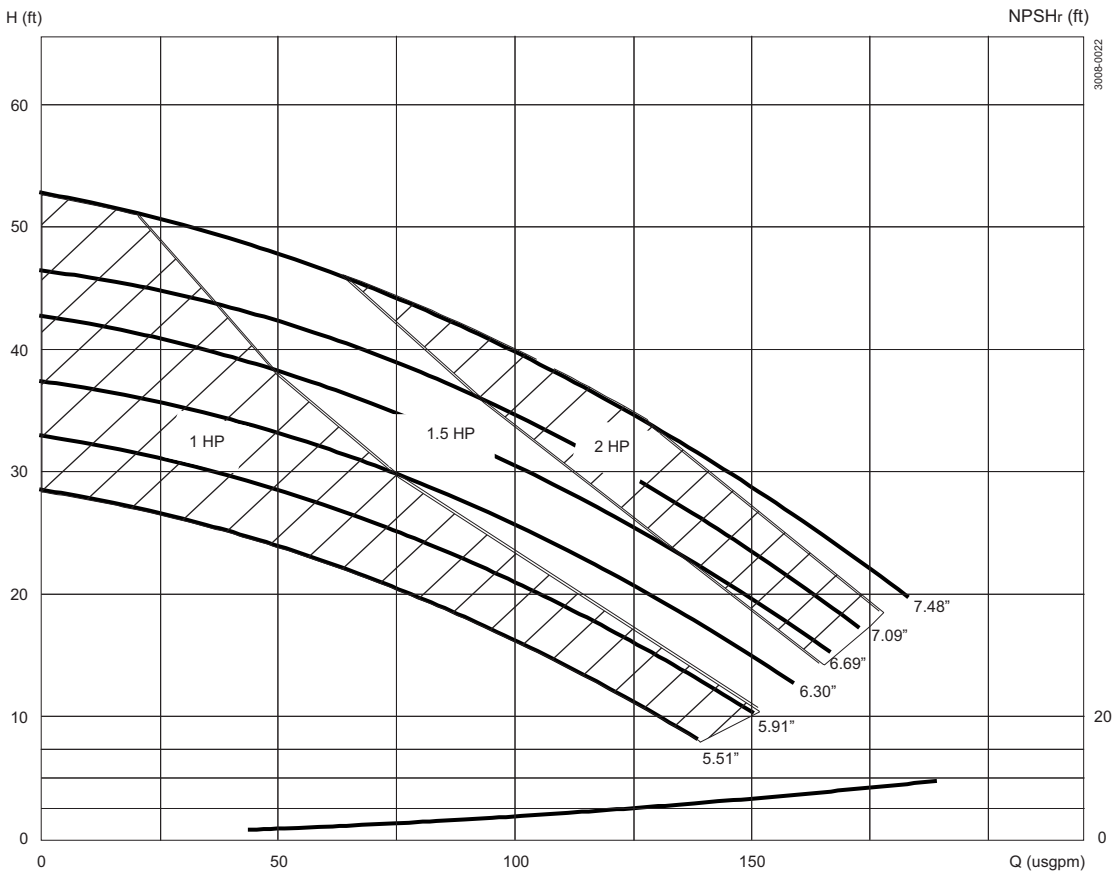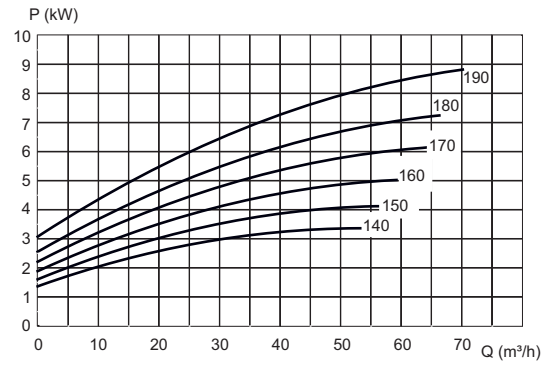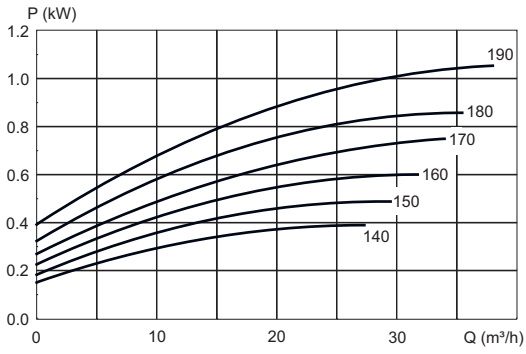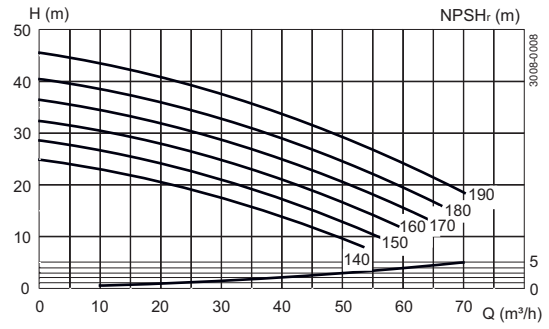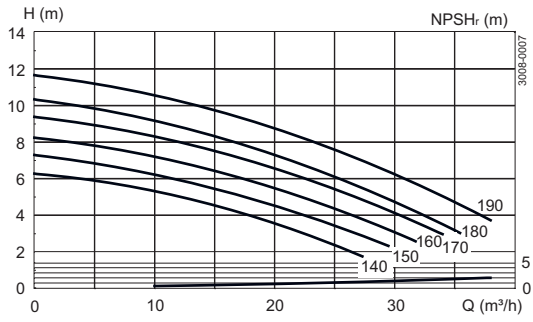

Alfa Laval reserves the right to change specifications without prior notification. ALFA LAVAL is a trademark registered and owned by Alfa Laval Corporate AB.

ESE01080EN 1507

© Alfa Laval

---

**How to contact Alfa Laval**

Contact details for all countries are continually updated on our website. Please visit [www.alfalaval.com](http://www.alfalaval.com) to access the information direct.