Performance Curves

SCPP 2/015

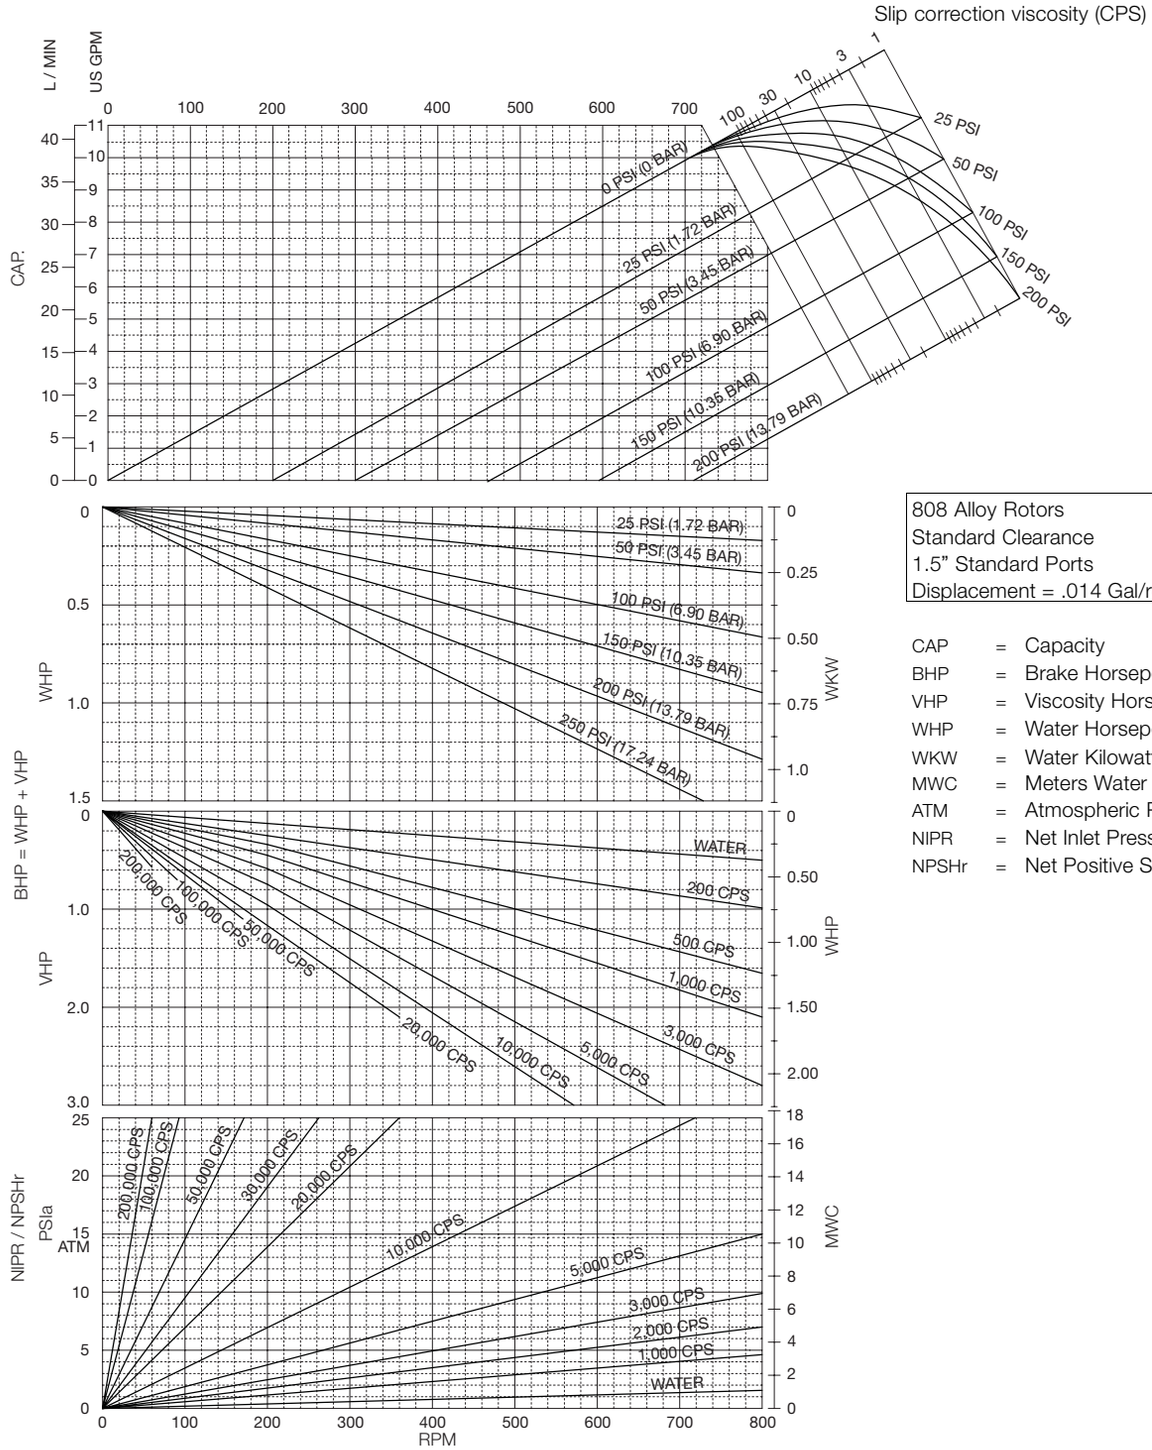

808 Alloy Rotors
Standard Clearance
1.5” Standard Ports
Displacement = .014 Gal/rev. (.052 L/Rev,)

CAP	=	Capacity
BHP	=	Brake Horsepower
VHP	=	Viscosity Horsepower
WHP	=	Water Horsepower
WKW	=	Water Kilowatts
MWC	=	Meters Water Column
ATM	=	Atmospheric Pressure
NIPR	=	Net Inlet Pressure Required
NPSHr	=	Net Positive Suction Head