




Performance Curves

SCPP 1/018

Slip correction viscosity (CPS)

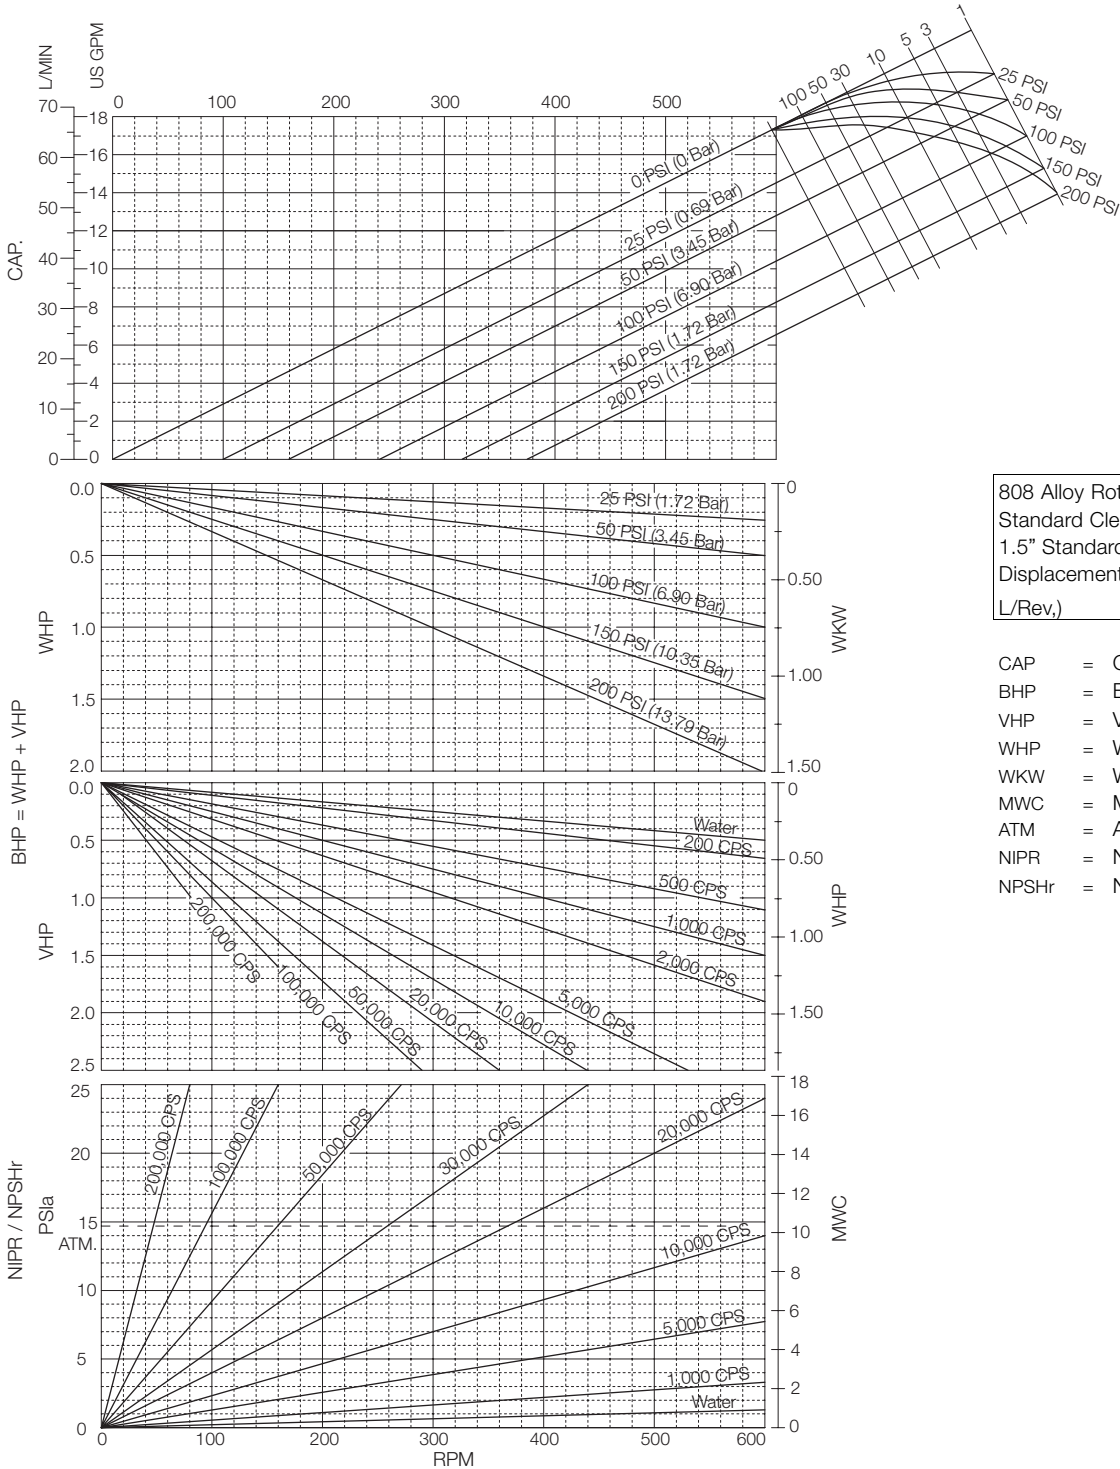

808 Alloy Rotors
 Standard Clearance
 1.5" Standard Ports
 Displacement = 0.029 Gal/rev. (.110 L/Rev.)

- CAP = Capacity
- BHP = Brake Horsepower
- VHP = Viscosity Horsepower
- WHP = Water Horsepower
- WKW = Water Kilowatts
- MWC = Meters Water Column
- ATM = Atmospheric Pressure
- NIPR = Net Inlet Pressure Required
- NPSHr = Net Positive Suction Head

Alfa Laval reserves the right to change specifications without prior notification. ALFA LAVAL is a trademark registered and owned by Alfa Laval Corporate AB.

ESE01715EN 1507

© Alfa Laval

How to contact Alfa Laval

Contact details for all countries are continually updated on our website. Please visit www.alfalaval.com to access the information direct.