




# Performance Curves

SCPP 2/180

Slip correction viscosity (CPS)

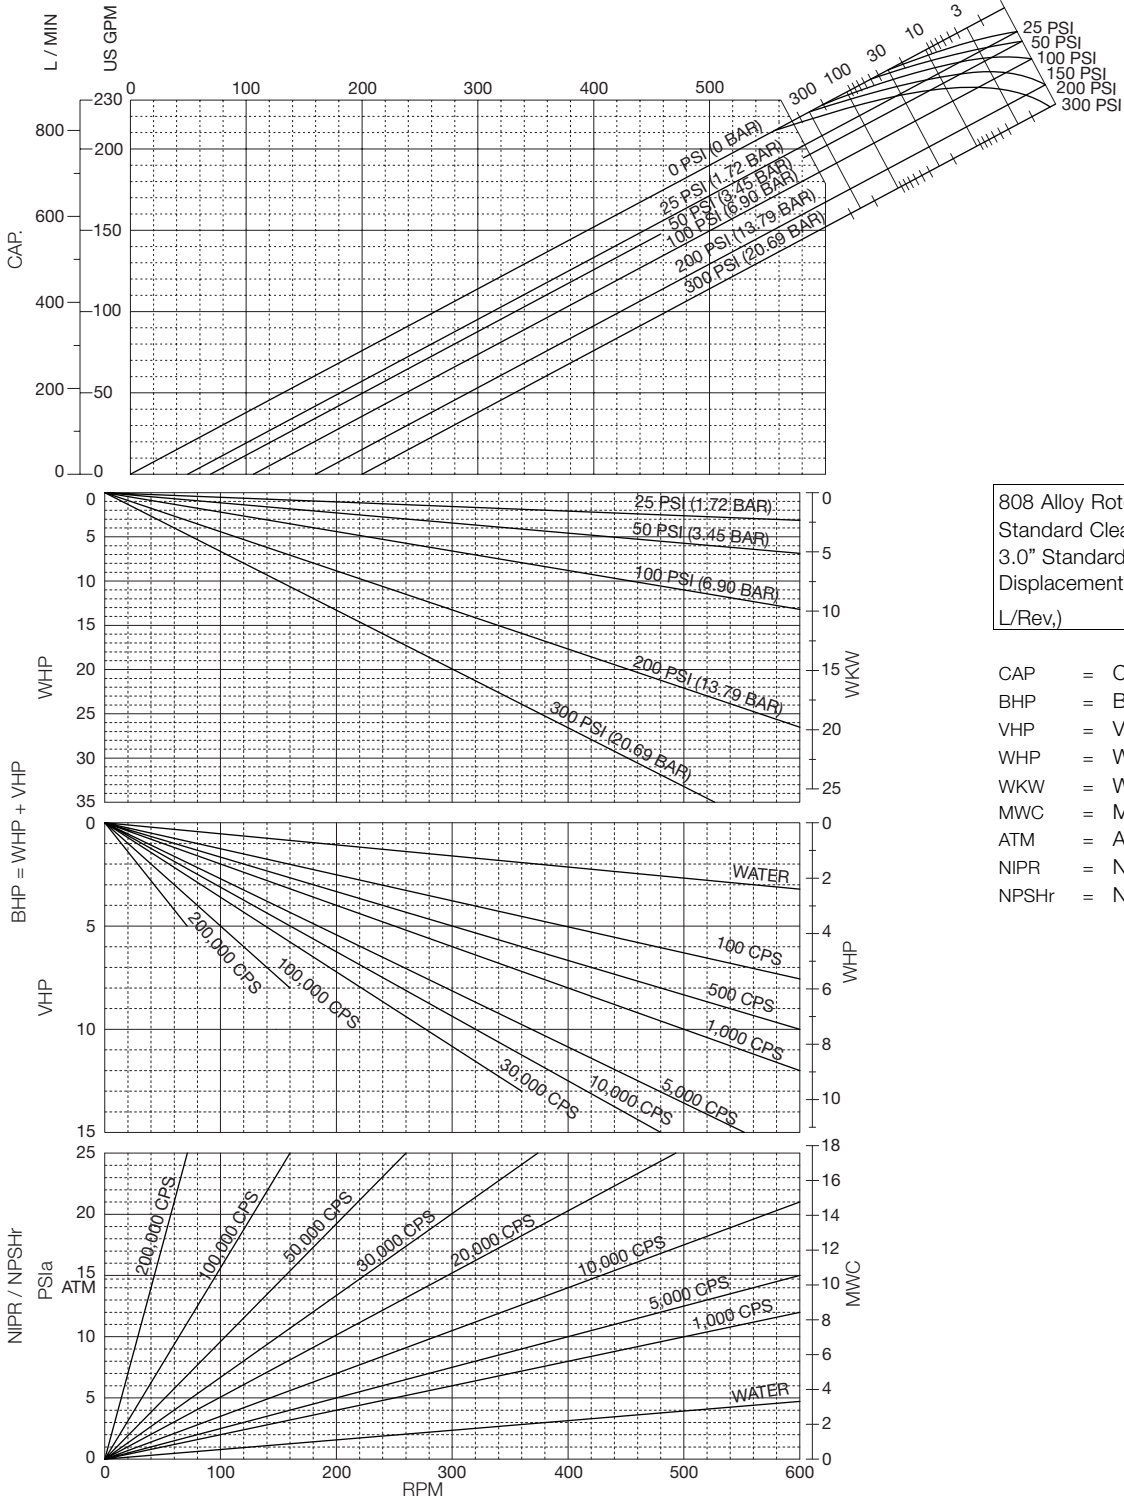

808 Alloy Rotors  
 Standard Clearance  
 3.0" Standard Ports  
 Displacement = .383 Gal/rev. (1.450 L/Rev.)

- CAP = Capacity
- BHP = Brake Horsepower
- VHP = Viscosity Horsepower
- WHP = Water Horsepower
- WKW = Water Kilowatts
- MWC = Meters Water Column
- ATM = Atmospheric Pressure
- NIPR = Net Inlet Pressure Required
- NPSHr = Net Positive Suction Head

Alfa Laval reserves the right to change specifications without prior notification. ALFA LAVAL is a trademark registered and owned by Alfa Laval Corporate AB.

ESE01729EN 1507

© Alfa Laval

---

**How to contact Alfa Laval**

Contact details for all countries are continually updated on our website. Please visit [www.alfalaval.com](http://www.alfalaval.com) to access the information direct.