

Performance Curves

LKH-/ LKHPF-/ LKH Evap-70, 50 Hz

Motor: **3000 rpm. synchron.**
 Tolerance: $\pm 5\%$
 Impeller, Max. dia.: 280 mm
 Impeller, Min. dia.: 200 mm
 Pump inlet, Dia.: 101.6 mm, DN 100
 Pump outlet, Dia.: 76 mm, DN 80
 Performance data refer to water at 20°C.
 NOTE!





Motor: **1500 rpm. synchron.**
 Tolerance: $\pm 5\%$
 Impeller, Max. dia.: 280 mm
 Impeller, Min. dia.: 200 mm
 Pump inlet, Dia.: 101.6 mm, DN 100
 Pump outlet, Dia.: 76 mm, DN 80
 Performance data refer to water at 20°C.
 NOTE!

The curves refer to motor: 75 kW, 2970 rpm. asynchron., 50 Hz. For smaller motors, reduce head (H) with: 2%.

The curves refer to motor: 11 kW, 1460 rpm. asynchron., 50 Hz.

DO NOT FORGET THE SAFETY FACTOR.

DO NOT FORGET THE SAFETY FACTOR.

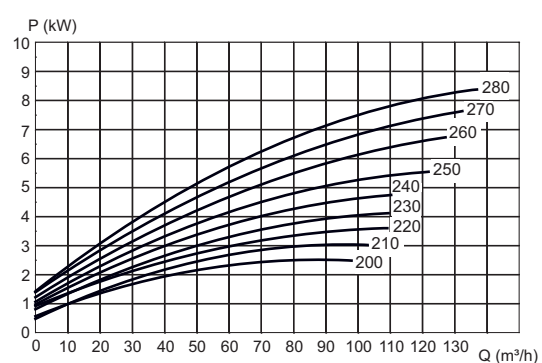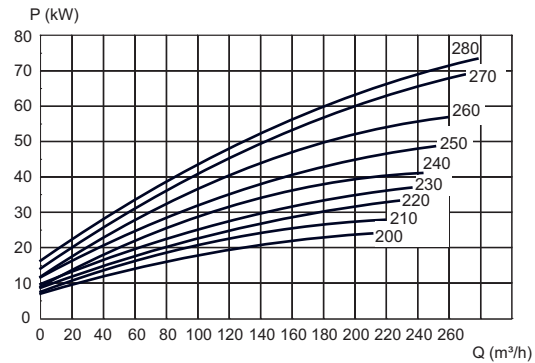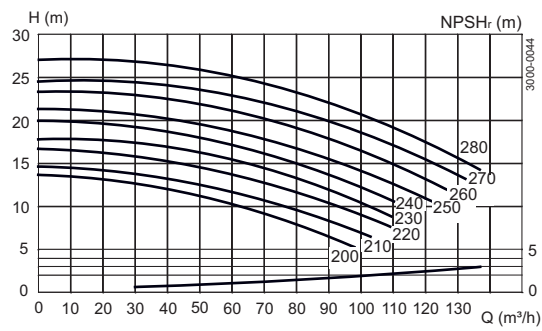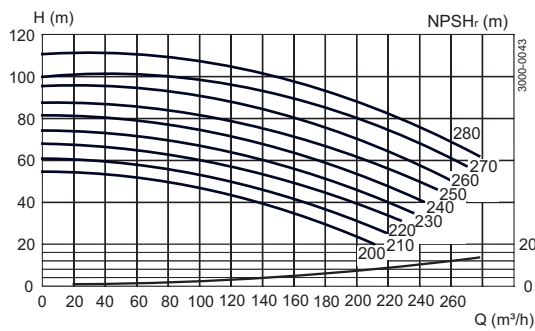

Note: If Clear Flow impeller is mounted the performance can be up to 10% lower than on the curves shown.