
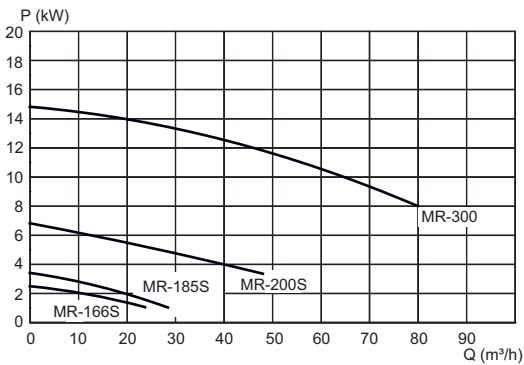


Performance Curves

MR Liquid-Ring Pump - 50 Hz/60 Hz

	50 Hz			
Motor:	1500 rpm. synchron.			
Tolerance:	±5%			
Type:	166S	185S	200S	300
	(mm)	(mm)	(mm)	(mm)
Impeller,:	165	199	199	240
Pump inlet, Dia.:	51	76	76	76
Pump outlet, Dia.:	51	76	76	76
Performance data refer to water at 20°C.				

DO NOT FORGET THE SAFETY FACTOR.

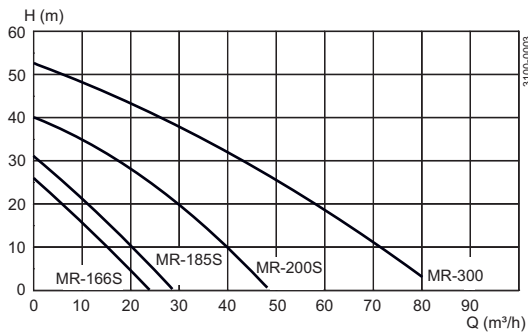

	60 Hz			
Motor:	1800 rpm. synchron.			
Tolerance:	±8% for Q. ±6% for H.			
Type:	166S	185S	200S	300
	(mm)	(mm)	(mm)	(mm)
Impeller,:	165	199	199	240
Pump inlet, Dia.:	51	76	76	76
Pump outlet, Dia.:	51	76	76	76
Performance data refer to water at 20°C.				

NOTE!

The curves refer to motor:

- MR-166S: 2.5 kW, 1720 rpm. asynchr., 60 Hz.
- MR-185S: 6.3 kW, 1740 rpm. asynchr., 60 Hz.
- MR-200S: 8.6/12.5 kW, 1790 rpm. asynchr., 60 Hz.
- MR-300: 25 kW, 1765 rpm. asynchr., 60 Hz.

