

Alfa Laval SaniMega SB

Rotary Spray Head

Introduction

The Alfa Laval SaniMega SB is a rotary spray head tank cleaning machine for hygienic environments. Designed to clean tanks from $40 - 400 \, \text{m}^3$.

The Alfa Laval SaniMega SB minimizes the consumption of water and cleaning media. Easy to customize to meet customer requirements, the SaniMega SB allows companies to spend less time cleaning and more time producing.

The SaniMega SB is authorized to carry the 3-A symbol.

Application

The Alfa Laval SaniMega SB is designed for the removal of residues from hygienic tanks across the dairy, brewery, distillery, beverage, food, personal care and many other industries.

Benefits

- 40% faster cleaning = more time for production
- Saves up to 40% of your cleaning cost
- Dynamic cleaning performance and 360° full wetting
- Easy to retrofit traditional spray balls to a more economical solution

Standard design

Different choice of spray patterns suitable for various applications and tank designs, ranging from simple tanks to more complex tanks with structures such as agitator and baffles. The SaniMega SB is lubricated by the cleaning media.

Working principle

The flow of the cleaning media causes the head of the Alfa Laval SaniMega SB to rotate, and the fan-shaped jets layout a swirling pattern throughout the tank or reactor. This generates the wetting/impact needed for the efficient removal of the residual product; the cascading flow covers all internal surfaces of the vessel.

Spray Pattern





360°





Certificates

2.2 materiale certificates, Q-doc, 3-A and ATEX.









TECHNICAL DATA

Lubricant:	Lubrication by rinse/cleaning fluid	
Wetting radius:	Max. 6 m	
Impact cleaning radius:	Max. 3 m	

Pressure	
Working pressure:	1 - 4 bar
Recommended pressure:	2 - 3 bar

PHYSICAL DATA

Materials	
Metallic parts:	AISI 316L
Non-metallic parts:	PEEK 450G ¹

7

Surface finish:	Ra 0.8 µm

Temperature	
Max. working temperature:	95 °C
Max. ambient temperature:	150 °C

Weight:	0.61 kg

Connections		
Clip-on:	2" BPE US	
Weld-on:	2" BPE US	

Clip

Easy-on/off clip (\emptyset 5.0 mm). Clip needed for both clip-on and weld-on versions to assemble the machine.

Recommended tank size:	50 - 350 m ³

Qualification Documentation

Documentation specification

Equipment Documentation includes:

- EN 1935/2004 DoC
- EN 10204 type 3.1 inspection Certificate and DoC
- FDA DoC

Q-doc

- GMP EC 2023/2006 DoC
- EU 10/2011 DoC
- ADI DoCQC DoC

ATEX approved machine for use in explosive atmospheres


Catagory 1 for installation in zone 0/20 in accordance with Directive 2014/34/EU

II 1G Ex h IIB 85 °C ...175 °C Ga

II 1D Ex h IIIC T85 °C ...T140 °C Da


3-A 3-A number: 78-##. Spray Cleaning Devices

Flow Rate

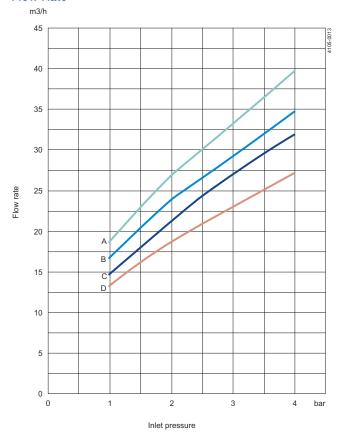


A = 360° High Flow B = 270° High Flow C = 360° D = 270°

Cleaning radius

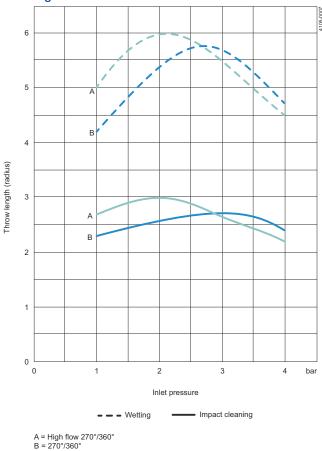



For Clip-on models, the flow rate is increased by approx. 2

Dimensions (mm)









Min. opening Ø85 mm 3.35 inch
4105-0016

Туре	Α	В	G	E	ID	OD	t	Clip
Clip-on 2" BPE US	121	Ø67.4	Ø5.1	25.4	Ø51.1			Ø5.0
Weld-on ¹ 2" BPE US	141.6	Ø67.4				Ø50.8	1.2	

¹ Weld-on version only meets the requirements of the 3-A Hygienic Standard 78-# # if installed according to the user manual

