



Alfa Laval SaniMega SB

Hygienic, Cleaning that meets 3-A standards

Application

The Alfa Laval Toftejorg SaniMega SB Rotary Spray Head is designed with respect to Self-Cleaning, Self-Draining and Inspectability. The patented One-clip assembly offers easy installation, disassembly and inspection without compromising cleanability and drainability. The Toftejorg SaniMega SB is an efficient replacement for the traditional Static Spray Ball as it offers liquid impact on the entire tank wall that lies within the spray pattern – a 270°U or a 360° pattern; both at a lower flow and high flow rate at equally low pressure.

Working principle

The flow of cleaning media causes the spray head of the Toftejorg SaniMega SB to rotate on a liquid film (Slide Bearing), with fans of water laid out in a swirling pattern on the entire perimeter within the spray pattern. This generates a vibrating impact in the impact zone and a dynamic cascading flow that covers all internal surfaces of the tank, vessel or reactor. The Self-Cleaning feature is due to the unique design that includes cleaning of the down pipe.



TECHNICAL DATA

Lubricant: Lubrication by rinse/cleaning fluid
 Wetting radius Max. 6 m
 Impact cleaning radius: Max. 3 m

Pressure

Working pressure: 1-4 bar
 Recommended pressure: 2-3 bar

Spray Pattern



360°



270° up

Standard Design

The Toftejorg SaniMega SB can be supplied with 3.1 Certificates for metallic parts and 3-A Conformity* on its plastic part.

Caution

Avoid hydraulic shock, hard and abrasive particles in the cleaning liquid, as this can cause increased wear and/or damage of internal mechanisms. In general, a filter in the supply line is recommended. Do not use for gas evacuation or air dispersion. For steaming we refer to the manual.

PHYSICAL DATA

Materials

Metallic parts: AISI 316L
 Non-metallic parts: PEEK 450G*
 * FDA compliance 21CFR§177
 Surface finish: Ra 0.8µm

Temperature

Max. working temperature: 95°C
 Max. ambient temperature: 150°C
 FDA compliant

Weight: 0.61 kg

Connections

Clip-on: 2" BPE US
 Weld-on: 2" BPE US*

Clip

Easy-on/off clip (ø5.0 mm). Clip needed for both clip-on and weld-on versions to assemble the machine.

Recommended tank size: 50-350 m³

Certificates

2.2 materiale certificates, Q-doc, EHEDG, 3-A and ATEX



Qualification Documentation (Q-doc)

Documentation specification


- Equipment Documentation includes:
- EN 10204 type 3.1 Material Inspection certificate
 - FDA Declaration of Conformity
 - ADI Declaration (TSE)
 - QC Declaration of Conformity

Q-doc

ATEX


ATEX approved machine for use in explosive atmospheres.
 Category 1 for installation in zone 0/20 in accordance to
 Ex II 1 GD c T 140°C.

Flow Rate

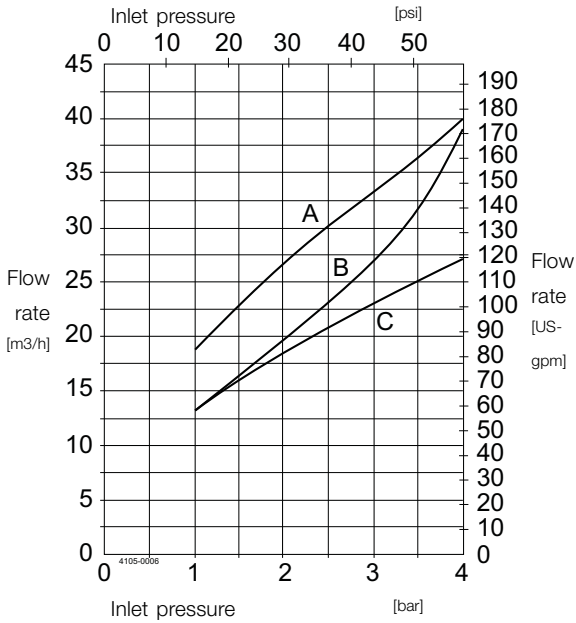

A = 360° High flow - B = 360° - C = 270°



Cleaning radius

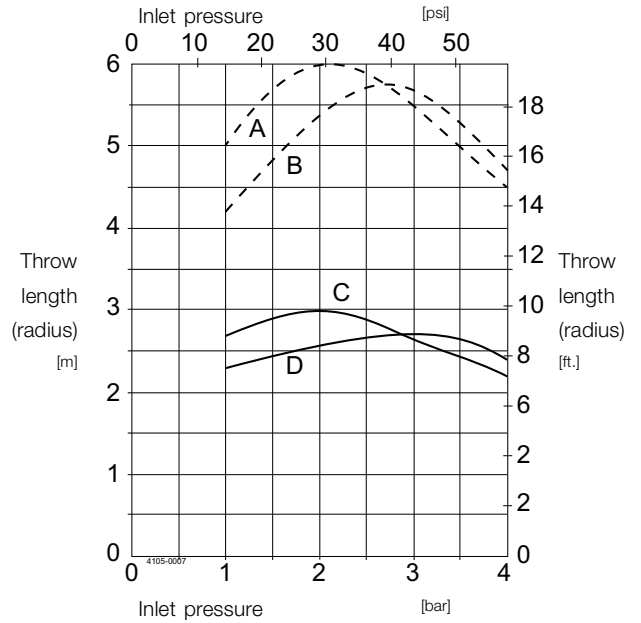

A = Wetting high flow - B = Wetting - C = Impact
 Cleaning high flow - D = Impact cleaning

For Clip-on models, the flow rate is increased by approx. 2 m³/h.

Note: The inlet pressure has been taken immediately before the inlet to the machine. In order to achieve the performance indicated on the curves, the pressure drop in the supply lines between pump and machine must be taken in consideration and the water temperature during testing was approx. 20°C.

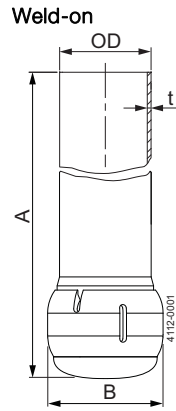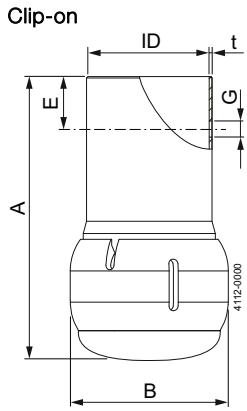

Dimensions (mm)

Type	A	B	G	E	ID	OD	t	Clip
Clip-on 2" BPE US	121	ø67.4	ø5.1	25.4	ø51.1			ø5.0
Weld-on** 2" BPE US	141.6	ø67.4				ø50.8	1.2	

** Weld-on version only meets the requirements of the 3-A Hygienic Standard 78-# # if installed according to the user manual.

Alfa Laval reserves the right to change specifications without prior notification.

How to contact Alfa Laval

Contact details for all countries
are continually updated on our website.
Please visit www.alfalaval.com to
access the information direct.