

Alfa Laval Access Tank Cover – Circular Cover Type HLSD-2

Tank covers

Introduction

The Alfa Laval Access Tank Cover – Circular Cover Type HLSD-2 is an outward-opening manway cover that provides a secure fit for openings on top of pressurized tanks and containers. It is approved for use on pressure vessels according to PED 2014/68/EU.

The HLSD-2 offers a quick, easy and convenient means of entry and egress to tank interiors. It also provides a closable means of access to the interior of the vessel, situated above or below the liquid level.

Application

The Access Tank Cover – Circular Cover Type HLSD-2 is designed for use in hygienic applications across the dairy, food, beverage, biotechnology, pharmaceutical and many other industries.

Benefits

- Versatility to cover all tank needs
- Hygienic design
- Easy to handle

Standard design

The Access Tank Cover – Circular Cover Type HLSD-2 consists of stainless steel lid, frame, hinge, swing bolt and seals. It is designed for installation in pressure vessels according to AD 2000-Merkblätt. The cover is not pressure tested and must be tested as a part of the pressure vessel. The HLSD-2 meets the PED 2014/68/EU, Fluid Group 1 and 2 and hazard category IV.

Working principle

The Alfa Laval Access Tank Cover – Circular Cover Type HLSD-2 lid is secured in the closed position by swing bolts. Together with the seal in the cover, the swing bolts ensure complete tightness. Attached to the frame by a rigid hinge, the cover secures the exact location of the cover in the closed position and is designed to stop the cover at an angle of 20-30° beyond the vertical position when opening.



Certificates

- 3.1 Certificate (EN10204)
- EC unit verification module G according to PED 2014/68/EU
- FDA declaration §177.2600 for seal material
- ASME BPE Certificate (option)

TECHNICAL DATA

Sizes

200 mm, 300 mm, 400 mm, 450 mm, 500 mm and 600 mm.

Pressure	
Max. allowable pressure:	According to selection table
Min. allowable negative pressure:	Full vacuum
Max. test pressure Ptest:	According to selection table

PHYSICAL DATA

Materials	
Product wetted steel parts:	1.4404 (AISI 316L)
Other steel parts:	1.4301 (AISI 304)
Seal:	EPDM, FPM, Silicone, FEP covered silicone, FEP covered FPM, PFA covered silicone

Standard surface finish	Semi bright
Outside	Ra 1.6 µm
Inside	Ra 0.8 µm

Temperature	
Temperature range:	-10 °C to + 250 °C


Options

- Spring to assist opening.
- Arrangement for securing cover in open and closed position.
- Bracket for indication unit in size ø12 or ø18. Please specify size at order.
- Handle in stainless steel.
- Guide for cover for vertical installation. Please define positioning of the hinge (right or left hand side).
- Sight glass DIN 28120.
- Sight glass DIN 11851.
- Safety grid.
- Special surface finish.
- Frame height G = 300 mm.
- Seal of Q (silicone), FPM, FEP covered silicone, PFA covered silicone, FEP covered FPM.
- Conical frame, different frame thickness and frame height available on request.

Selection table

Size mm	A mm	Number of bolts	Max. allowable pressure PS (bar) at design temperature Td (°C)					Max. test pressure Ptest bar	Cover thickness (SL) mm	Cover radius mm
			50 °C	100 °C	150 °C	200 °C	250 °C			
200	208	4	14.7	13.0	11.8	10.8	10.0	21.1	8	500
300	308	4	7.6	6.7	6.4	6.1	6.0	13.5	5	500
		6	9.4	8.4	7.5	6.9	6.4	13.5	6	500
400	408	4	4.4	3.8	3.7	3.5	3.4	10.1	4	500
		6	6.6	5.8	5.5	5.3	5.2	14.3	5	500
		8	8.7	7.7	7.4	7.1	6.8	14.3	6	500
450	458	6	5.2	4.6	4.4	4.2	4.1	12.0	4	500
		8	7.0	6.1	5.9	5.7	5.5	12.5	5	500
		10	8.7	7.7	7.1	7.0	6.8	14.5	6	500
500	508	6	4.2	3.7	3.6	3.4	3.3	9.8	4	500
		8	5.7	5.0	4.8	4.6	4.5	10.7	4	500
		10	7.5	6.9	6.6	6.3	6.2	12.0	5	500
600	608	6	3.0	2.6	2.5	2.4	2.3	6.9	4	500
		8	4.0	3.5	3.3	3.2	3.1	7.7	4	500
		10	5.0	4.4	4.2	4.0	3.9	7.7	4	500
		12	6.0	5.3	5.0	4.9	4.7	8.8	5	500
		14	7.0	6.1	5.9	5.7	5.4	10.0	5	500

Dimensions (mm)

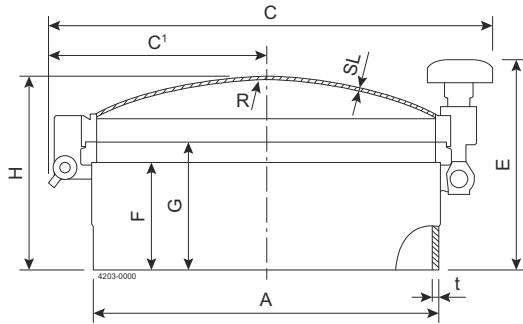

Size	200	300	400	450	500	600
A	208	308	408	458	508	608
C ₁	154	204	254	279	309	359
C	320	420	520	570	625	725
E	237	237	247	247	247	247
F	125	125	125	125	125	125
G	150	150	150	150	150	150
H	185	198	226	240	251	285
R	500	500	500	500	500	500
SL see selection table						
t ¹	4	4	4	4	4	4

¹ Dimension only for guidance, measured before grinding and polishing

O-ring gaskets (HLSD-2)

Silicone

Colour:	transparent
Temperature:	-50 °C to +200 °C FDA / USP Class VI

EPDM

Colour:	black
Temperature:	-50 °C to +150 °C FDA / USP Class VI

Viton (FPM)

Colour:	green
Temperature:	-20 °C to +200 °C FDA

FEP covered Silicone

Colour:	shell: transparent, core: red
Temperature:	-60 °C to +200 °C FDA / USP Class VI

FEP covered Viton (FPM)

Colour:	shell: transparent, core: black
Temperature:	-20 °C to +200 °C FDA / USP Class VI

PFA covered Silicone

Colour:	shell: transparent, core: red
Temperature:	-60 °C to +230 °C FDA / USP Class VI

This document and its contents are subject to copyrights and other intellectual property rights owned by Alfa Laval Corporate AB. No part of this document may be copied, re-produced or transmitted in any form or by any means, or for any purpose, without Alfa Laval Corporate AB's prior express written permission. Information and services provided in this document are made as a benefit and service to the user, and no representations or warranties are made about the accuracy or suitability of this information and these services for any purpose. All rights are reserved.

How to contact Alfa Laval

Up-to-date Alfa Laval contact details for all countries are always available on our website at www.alfalaval.com